


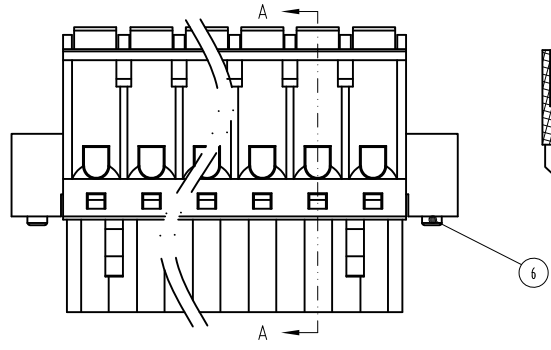
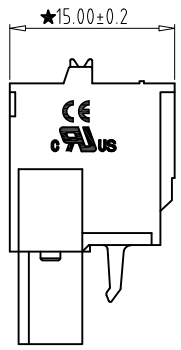


REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.11.05

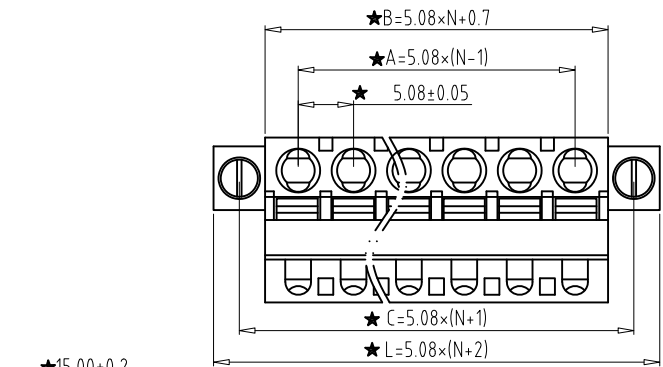


SECTION A-A




Electrical :

- | | | |
|---|---------------|------------------------|
| | UL | IEC |
| 1. Rated Voltage : | 300V | 320V |
| 2. Rated Current : | 10A | 20A |
| 3. Wire Range: | 26-12AWG | 0.2-2.5mm ² |
| 4. Stripping Length : | 7-8mm | |
| 5. Withstanding Voltage : | AC1600V/1Min. | |
| 6. Operating Temperature : | -40°C~+105°C | |
| 7. RoHS Compliance | | |
| 8. Safty Approval : | CE RoHS | |
| 9. "★" is the key quality control point | | |



- ① Series NO. ④ 1 Single Pitch
2 Double Pitch
- ② Pitch:5.08mm ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ⑥ Customer Request: 00--Standard

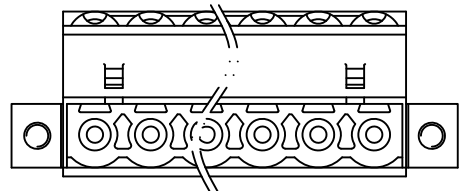

Total Pitch Tolerances in mm									Nominal dimension range in mm											⊥		≡		—		//	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	over 10	all	over 0	over 100	over 150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5			

6	SCREW-SIDE	XX	2	STEEL	Zn Plated
5	SPRING	XX	N	Stainless Steel	--
4	CLAMP	XX	N	Phosphor Bornze	Ni Plated
3	BUTTON	XX	N	POM UL94HB	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	20.05.13	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE			SCALE	1:1 立式按钮带耳朵公插头
APP.	DATE			NAME	2EGTKDM-5.08-XXP-XX-00
				DWGNO.	XXXX

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.