


Screw clamping terminal block-  
UKJ-4/1 × 2- 011040



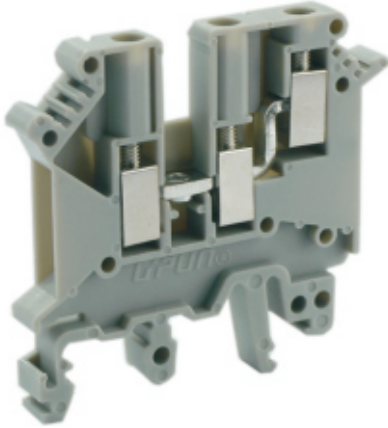


Screw clamping terminal block , rated voltage:500V , Max. operating current:32A, connection method : screw connection , number of connections : 3 , crimping range : 0.2mm<sup>2</sup> -4mm<sup>2</sup> , thickness:6.2mm , height:47mm , color : grey , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	100
NW per piece(g)	1.18
Layers	2
Number of connections	3
Rated cross section(mm <sup>2</sup> )	4
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	500
Rated current(A)	32
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	<b>IECEX</b>
Certification logo	<b>cRU<sup>®</sup> US</b>
Certification logo	
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm <sup>2</sup> )	0.2-4
Stranded conductors(mm <sup>2</sup> )	0.2-4
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	50.5

Parameter	Data
Thickness(mm)	6.2
Height(mm)	47