


Barrier screw terminal block-UTD-10-391001





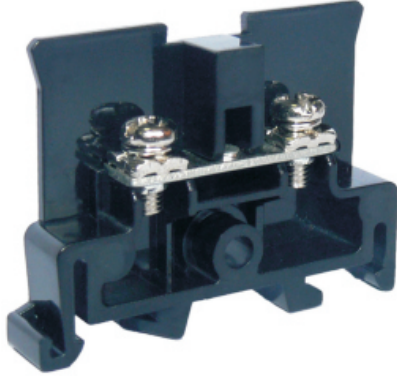

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:15A, connection
method : screw connection , number of
connections : 2 , crimping
range : 0.75mm² -1.25mm² ,AWG : 18-16 , th
ickness:7.3mm , height:29mm , color : Black ,
mounting
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm ²)	1.25
Color	black
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	15
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
Certification logo	
Certification logo	

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3 × 7
Stripping length(mm)	/
Tightening torque	0.6-0.9
Solid conductors(mm ²)	0.75-1.25
Solid conductors AWG	18-16
Stranded conductors(mm ²)	0.75-1.25
Stranded conductors AWG	18-16
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	40
Thickness(mm)	7.3
Height(mm)	29