


### Spring-cage connection terminal block- UJ2-2.5 - 441002

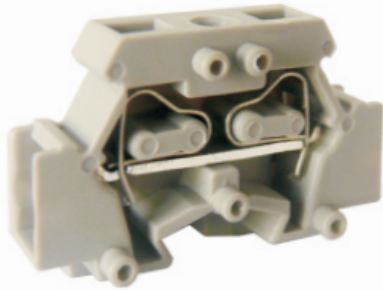

Spring-cage connection terminal block , rated voltage:500V , Max. operating current:24A, connection method : Spring-cage connection , number of connections : 2 , crimping range : 0.08mm<sup>2</sup> -2.5mm<sup>2</sup> , thickness : 6mm , height:18.2mm , color : grey , mounting type : TH35-7.5

### Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	2.5
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	500
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

### Product certification

Parameter	Data
Certification logo	<b>CE</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	8-9
Solid conductors(mm <sup>2</sup> )	0.08-2.5
Solid conductors AWG	/
Stranded conductors(mm <sup>2</sup> )	0.08-2.5
Stranded conductors AWG	/
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	28.2
Thickness(mm)	6
Height(mm)	18.2