

# TX2.5




## TX2.5:TEST PLUG

The Test Plugs make contact with the Jumper shaft of Terminal Block. Test adapters can be assembled with spacer to create space between two plugs & making alternate arrangement.

### PRODUCT SPECIFICATION

Application	Testing
Conductor Cross Section in AWG	12 AWG
Conductor Cross Section in sq. mm	2.5 mm <sup>2</sup>
Height	40.8 mm
Rated Current	24 A
Rated Voltage	800 V

### PRODUCT DIAGRAM

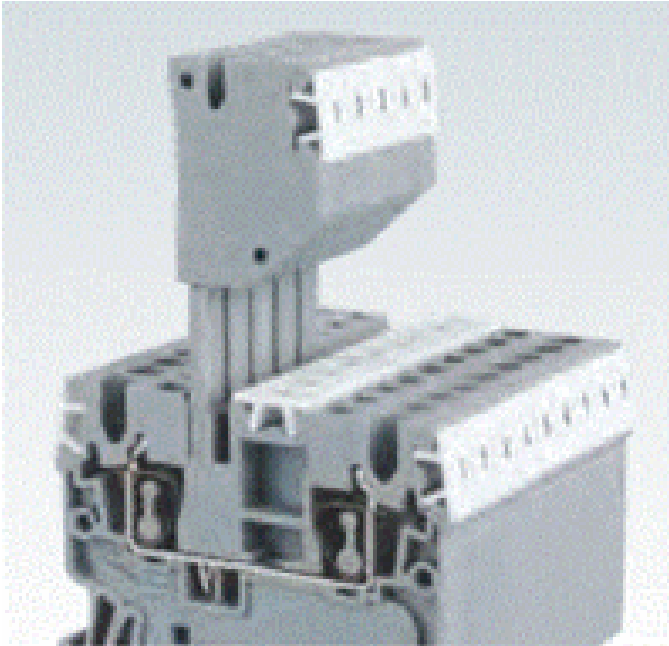

### ORDERING INFORMATION

CAT. NO.	DESCRIPTION	STD. PACK
TX2.5	TEST PLUG	20

### SUITABLE FOR

CXDLG2.5/2B	2.5 sq.mm Double Level Ground/Earth Spring Clamp Terminal Blocks
CP2.5/3	2.5 sq.mm Push In Feed Through compact Terminal Blocks
CPDL2.5(E)DD1	2.5 sq.mm Terminal Blocks in Pushin connection with diode circuit - DD1 configuration
CPDLG2.5(I.S)	2.5 sq.mm Multiple Connection Earthing Terminal Blocks with 4 connection points.
CPTL2.5(I.S)	2.5 sq.mm Three Level, Internally Shorted, Push in Terminal Block
CX4	4 sq.mm Spring Clamp Feed Through compact Terminal Blocks
CXDLG2.5/2B/I.S	pluggable feed through Spring Clamp Ground Terminal Block Internally shorted in Green Yello colour
CYK2.5	2.5 sq.mm Knife Type Disconnect and Test Terminal Blocks
CP3L2.5N	2.5 sq.mm Triple Level Push in Terminal Blocks
CPDL2.5(E)D1	2.5 sq.mm Terminal Blocks with diode circuit - D1 configuration
CPDL2.5(E)D2	2.5 sq.mm Terminal Blocks with diode circuit - D2 configuration
CPDL2.5(E)DD5	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD5 configuration
CPDLG2.5	2.5 sq.mm Double Level Earthing Terminal Blocks.
CPTLG2.5	2.5 sq.mm Three Level Earthing Terminal Blocks.
CX2.5/4/4B	2.5 sq.mm pluggable 4 wire feed through Spring Clamp Terminal Block
CXDL2.5/2B	2.5 sq.mm pluggable feed through Spring Clamp Terminal Block
CXDL2.5/2B/I.S	pluggable feed through Spring Clamp Terminal Block Internally shorted
CXDL2.5/3(E)TS1	2.5 sq.mm Double Level Terminal Blocks with Temperature Sensor indication - TS1 Configuration
CYK2.5/S	2.5 sq.mm Knife Type Disconnect and Test Terminal Blocks with socket headed screw
CPDL2.5(E)DD4	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD4 configuration
CPDL2.5(E)LD1	2.5 sq.mm Double Level Terminal Blocks with LED indication for LD1 Configuration
CPDL2.5(E)TS1	2.5 sq.mm Double Level Terminal Blocks with Temperature Sensor indication - TS1 Configuration

TX2.5



**connectwell**  
THE RIGHT CONNECTION

**SUITABLE FOR**

CPDL2.5(I.S)	2.5 sq.mm Multiple Connection Internally Shorted Terminal Blocks with 4 connection points.
CPTL2.5	2.5 sq.mm Triple Level Push in Terminal Blocks
CX2.5	2.5 sq.mm Spring Clamp Feed Through compact Terminal Blocks
CPDL2.5	2.5 sq.mm Double Level Push in Terminal Blocks
CPDL2.5(E)D3	2.5 sq.mm Terminal Blocks with in Push In Connection with diode circuit - D3 configuration
CPDL2.5(E)DD2	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD2 configuration
CPDL2.5(E)DD3	2.5 sq.mm Terminal Blocks in Push in with diode circuit - DD3 configuration
CPDL2.5(E)DD6	2.5 sq.mm Terminal Blocks in push-in connection with diode circuit - DD6 configuration
CPK2.5	CPK2.5 : 2.5 sq.mm Push in Knife Disconnecting Compact Terminal Blocks
CPTLG2.5(I.S)	2.5 sq.mm Three Level Internally Shorted Earthing Terminal Blocks