





R OH 100 M 2G1012 1 P 7 BS00

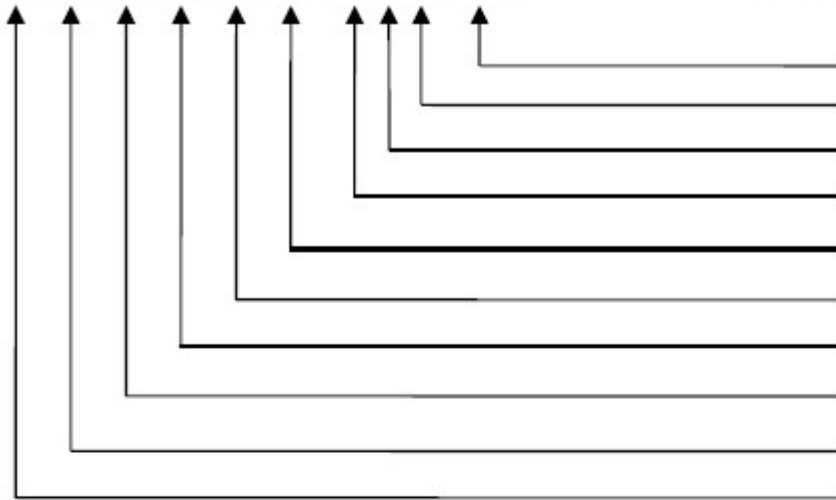


Lead
SINECON
Sleeve: PET
Rubber: 乙丙胶
Size 10*12
Voltage: 400V
Tolerance: $\pm 20\%$
Capacitance: 10UF
Series: CD11H, 105°C
Radial

R OH 220 M 2G1220 1 P 7 AS00

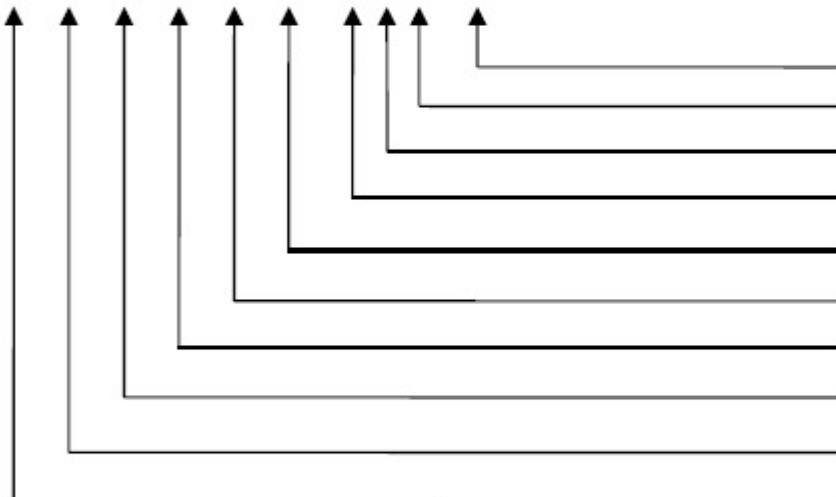

Lead
SINECON
Sleeve: PET
Rubber: 乙丙胶
Size: 12.5*20
Voltage: 400V
Tolerance: $\pm 20\%$
Capacitance: 22UF
Series: CD11H, 105°C
Radial

R OH 220 M 2W1225 1 P 7 AS00

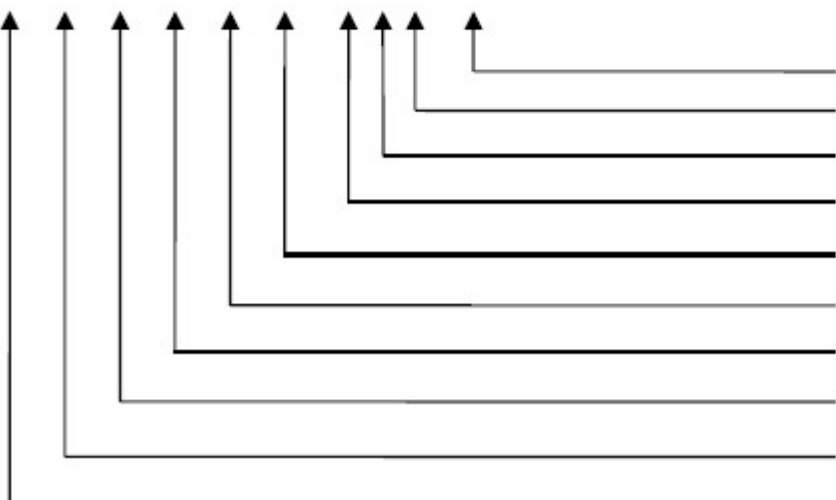

Lead
SINECON
Sleeve: PET
Rubber: 乙丙胶
Size: 12.5*25
Voltage: 450V
Tolerance: $\pm 20\%$
Capacitance: 220UF
Series: CD11H, 105°C
Radial