


FUSE

Thermal Fuse Series

KLS5-KSD9700 Thermal Fuse Series

Rated Voltage: AC250V/AC125V;
 Rated Current: 5A ~ 7A
 Electric intensity: 800V Min.
 Contact resistance: 30mΩ Max.
 Insulation resistance: 100MΩ Min.
 Response speed: ≤1°C/ min
 Number of automatic cycles: 6000 Max. (Resistive Load)

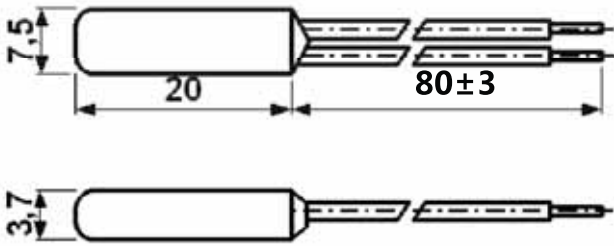

Code	Action temperature (°C)	Reset temperature	Voltage AC(V)	Current (A)
55	55±5	≥30±10	250	5
60	60±5	40±10	250	5
65	65±5	45±10	250	5
70	70±5	50±10	250	5
75	75±5	55±10	250	5
80	80±5	60 ± 10	250	5
85	85±5	65 ± 10	250	5
90	90±5	70 ± 10	250	5
95	95±5	75 ± 10	250	5
100	100±5	80 ± 10	250	5

Code	Action temperature (°C)	Reset temperature	Voltage AC(V)	Current (A)
105	105±5	70 ± 12	250	5
110	110±5	75 ± 12	250	5
115	115±5	80 ± 12	250	5
120	120±7	85 ± 12	250	5
125	125±7	90 ± 12	250	5
130	130±7	95 ± 12	250	5
135	135±7	100 ± 12	250	5
140	140±7	105 ± 12	250	5
145	145±7	110 ± 12	250	5
150	150±7	110 ± 12	250	5
155	155±5	130 ± 12	250	5
160	160±5	135 ± 12	250	5

ORDER INFORMATION

Product No.: KLS5-KSD9700-5A80-B X X X

