

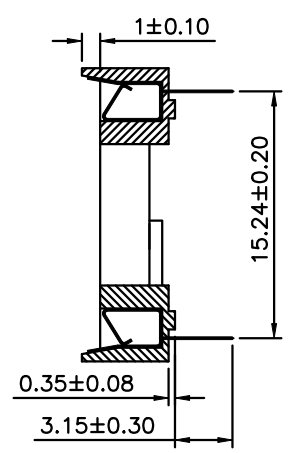


Recommended P.C.B. Layout

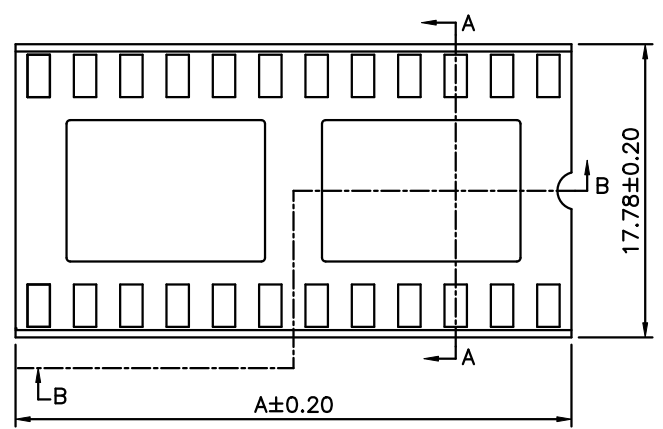

Section A-A

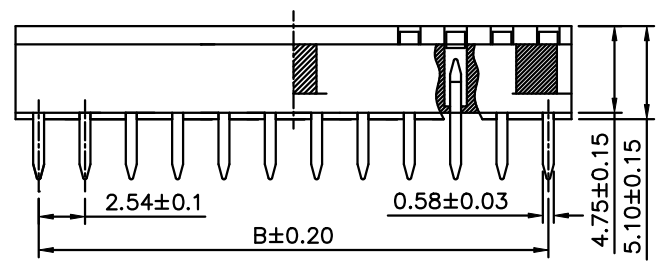

Section B-B

△ SPECIFICATION

Current Rating:1A
 Dielectric Withstanding Voltage:1000V RMS/Minute
 Insulator Resistance:5000 Megaohms Min.
 Contact Resistance:20 Milliohms initial.
 30 Milliohms After Test.
 Operating Temperature:-55°C To 85°C
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 Insulator:PBT(UL94V-0)
 RoHS Compliant

△ IC 06 XX - H
 (1) (2) (3) (4)

- (1) IC:2.54mm IC Socket DIP Straight
- (2) 06:Width 0.6 Inch
- (3) XX:No. Of Position
- (4) H:RoHS Compliant

Pin	A	B
24	30.48	27.94
28	35.56	33.02
32	40.64	38.10
40	50.80	48.26
42	53.34	50.80
48	60.96	58.42

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
PART No. IC06XX-H		MEI		
DRAWING No. IC06XX-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A1	UNIT mm		

NO. REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	08/11/2016
△ A0	NEW RELEASE	BECKY	08/16/2005