


# POT & CUT TYPE CORES

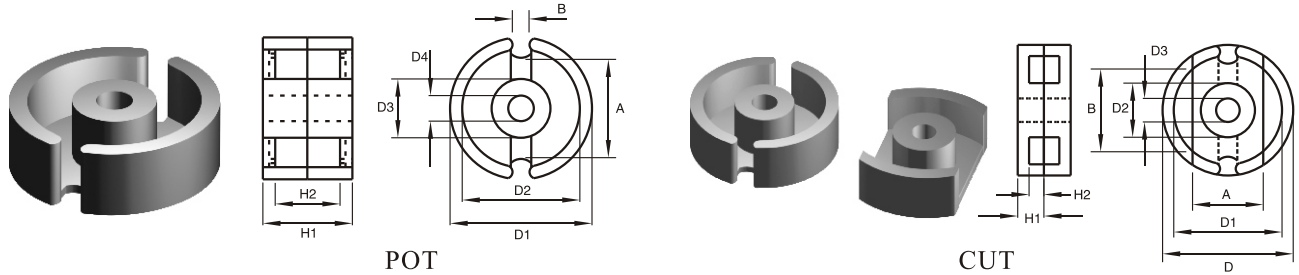

## POT TYPE CORES (MATERIALS): P1, P2, P3, HQ8H, HQ2K, HQ2KA Dimensions & Effective parameter

CORES TYPE	Dimensions(mm)								Effective parameter					
	A	B	D1	D2	D3	D4	H1	H2	C1 (mm <sup>-1</sup> )	Ae (mm <sup>2</sup> )	Le (mm)	Ve (mm <sup>3</sup> )	Al±25% (nH/N2)	Weight(g)
P0704	5.5±0.2	1.6±0.3	7.4-0.4	5.8+0.25	3-0.2	1.4+0.1	4.2-0.2	2.8+0.2	1.43	7.0	10.0	70	460min (HQ2K)	
P0905	6.5±0.25	2±0.2	9.3-0.3	7.5+0.25	3.9-0.2	2.1±0.1	5.4-0.3	3.6+0.3	1.25	10.1	12.5	126	820min (HQ2K)	1.0
P1107	6.8±0.25	2.2±0.3	11.3-0.4	9+0.4	4.7-0.2	2.1±0.1	6.6-0.3	4.4+0.3	0.96	16.2	15.5	251	1070min (HQ2K)	1.7
P1408	9.5±0.3	2.7±1.2	14.3-0.5	11.6+0.4	6.0-0.2	3.1±0.1	8.2+0.3	5.6+0.4	0.79	25.1	19.8	495	1390min (HQ2K)	3.5
P1811	13.4±0.3	3.8±0.6	18.4-0.8	14.9+0.5	7.6-0.3	3.1±0.1	10.6±0.2	7.2+0.4	0.60	43.3	25.8	1120	1970min (HQ2K)	8.0
P2213	15±0.4	3.8±0.6	22-0.8	17.9+0.6	9.4-0.3	4.4+0.3	13.4±0.2	9.2+0.4	0.50	63.4	31.5	2000	2340 min (HQ2K)	14.0
P2616	18±0.4	3.8±0.6	25.5±0.5	21.2+0.8	11.5-0.4	5.4+0.2	16.1±0.2	11+0.4	0.40	93.9	37.6	3530	2970 Min (HQ2K)	23.2
P3019	20.5±0.5	4.3±0.6	30±0.5	25+0.8	13.5-0.4	5.4+0.3	18.8±0.2	13+0.4	0.33	137.0	45.0	6190	3840 min(HQ2K)	39.0
P3622	26.2±0.6	4.9±0.6	36.2-1.2	29.9+1	16.2-0.6	5.4+0.2	21.7±0.3	14.6+0.4	0.26	202.0	53.2	10700	5200 min(HQ2K)	64.0
P4226	32±0.7	5.1±0.6	42.4±0.7	35.6+1.4	17.7-0.6	5.4+0.2	29.4±0.1	20.3+0.4	0.259	265.0	68.6	18200	6000min (HQ2K)	108.0
P4830		8.0	48.5-2.1	39.6+2.2	20.2-1.0	5.20+0.5	29.8±0.6	20.3+0.6	0.22	337.8	73.2	24730	6800 min(HQ2K)	147.0
P5936			59.0+1.5	50.0±1.0	24.4±0.3	5.5±0.3	36.4±0.3	25.0±0.6	0.18	485.0	88.0	42600	6900 min(HQ2K)	220.0
P6928	10.5±0.5	4.8±0.8	69.0±1.0	58.4±0.8	29.0±0.5	8.65±0.3	28.0±0.5	18.6±0.6	0.13	614	81.5			286.0
P8060			80.0-3.3	69.0±1.4	33.0±0.5	9.0±0.5	60.0±0.3	44.6±0.6						
P112/60			112±3.8	100.0±3.8	42.0±1.5	11.0±0.6	60.0±1.3	44.6±0.6						

## CUT TYPE CORES (MATERIALS): P1, P2, P3, HQ8H, HQ2K, HQ2KA Dimensions & Effective parameter

CORES TYPE	Dimensions(mm)								Effective parameter					
	A	B	H1	H2	D	D1	D2	D3	C1 (mm <sup>-1</sup> )	Ae (mm <sup>2</sup> )	Le (mm)	Ve (mm <sup>3</sup> )	Al±25% (nH/N2)	Weight(g)
C14×8	9.55±0.15	7.6min	4.18±0.08	2.70min	14.0±0.25	11.6min	5.99max	3.1±0.07	0.91	23.2	21.2	492	2500	2.8
C18×11	12.20-0.65	9.80	5.8-0.30	3.60+0.40	18.8-0.30	15.1+0.80	7.6-0.50	2.9+0.30	0.67	40.6	27.2	1110	4800	6.4
C22×13	15.20±0.25	10.5	7.0-0.30	4.60+0.40	22.4-0.12	18.1+1.0	9.4-0.50	4.3+0.4	0.47	61.0	28.6	1740	4500	12.0
C30×19	20.30±0.30	12.5	9.40±0.10	6.60±0.10	20.00±0.50	25.40±0.40	13.30±0.20	5.55±0.15	0.347	128.1	44.4	5688	6000	29.0