
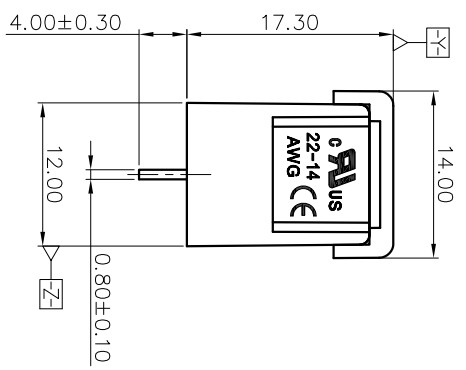
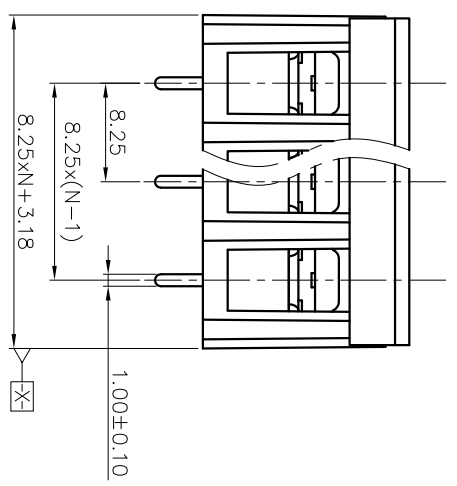



(W/O COVER)

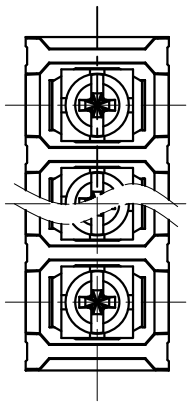


NOTES1:
UL Standard
1. Rated voltage/current : 300V / 15A
2. Torque value : M3 , 4.43lb.in
3. Wire range : 22~14AWG

NOTES2:


1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 8.25mm, Poles : N=02~28P
3. Stripping length : 6~7mm
4. Withstanding voltage : AC1600V/1Min
5. Operating temperature: -40°C~+105°C
6. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		mm	mm
Over	Over	Over	Over	Over	Over
6	10	30	60	100	150
TO	TO	TO	TO	TO	TO
6	10	24	30	60	150
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
±1.00	±1.30	±1.00	±1.30	±2.00	±2.00

7. RoHS Compliance

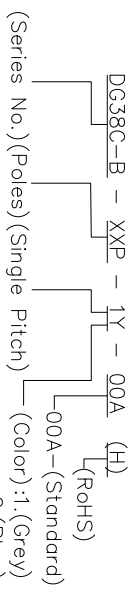

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

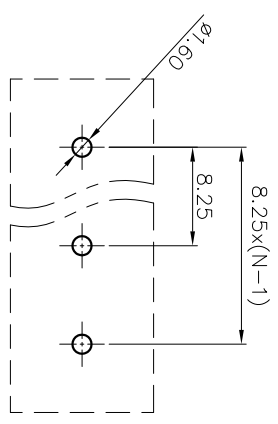

PCB LAYOUT

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD
APPR.:	/	CHKD.:	/
DRTT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		REV	DO
		SHEET	1/1
		SCALE	1:1

宁波高松电子有限公司

NINGBO DEGSON ELECTRICAL CO., LTD

DG38C-B-XXP-1Y-00A(H)

CUSTOMER DRAWING

THIRD ANGLE PROJECTION