
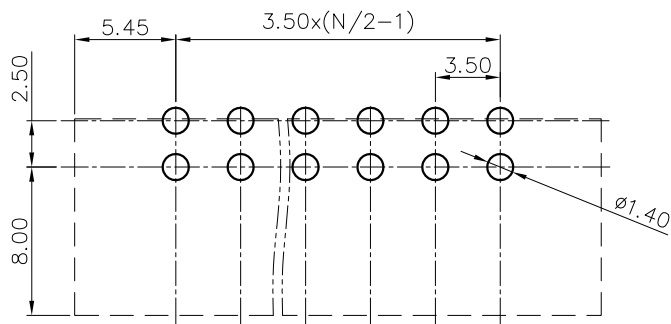
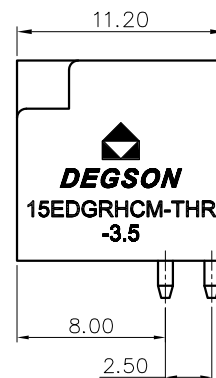
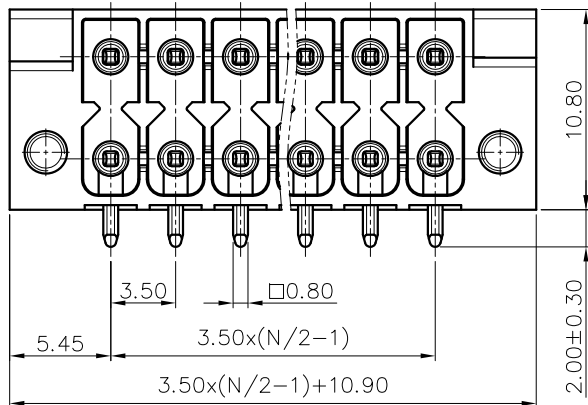


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

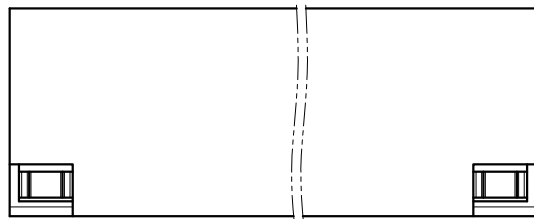

PCB LAYOUT

NOTES1:

UL Standard

- 1. Rated voltage/current : 150V / 8A
- 2. Withstanding voltage : AC1300V/1Min.

IEC Standard


1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	250V	160V	160V
Rate current(A)	8A		

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5mm, Poles : N=04~48P
- 3. Operating temperature: -40°C~+130°C
- 4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					Tolerances	
TO	Over	TO	Over	TO	Over	TO	Over	0.1/10
6	10	10	24	30	60	100	150	≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

5. RoHS Compliance

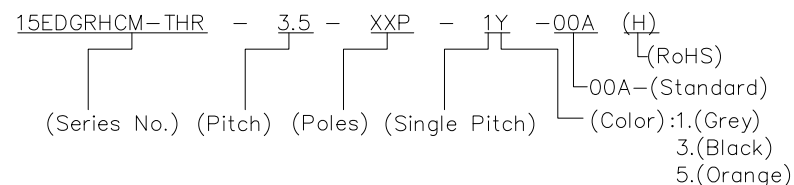

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
		<p>THIRD ANGLE PROJECTION</p>		<p>MM (INCH)</p>	
		DO NOT SCALE DRAWING		REV	DO
		DRAWING NO.:		SHEET	1/1
		/		SCALE	1:1

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD



NAME:  
15EDGRHCM-THR-3.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.:

MM (INCH)

DO NOT SCALE DRAWING

REV

DO

SHEET

1/1

SCALE

1:1