
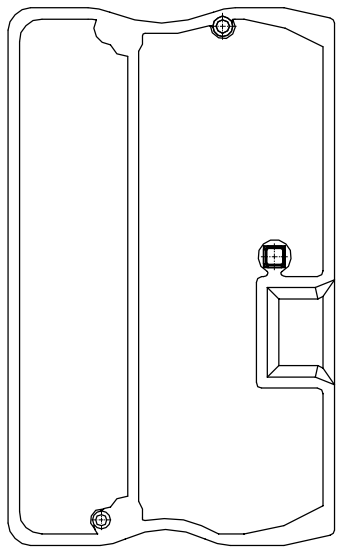

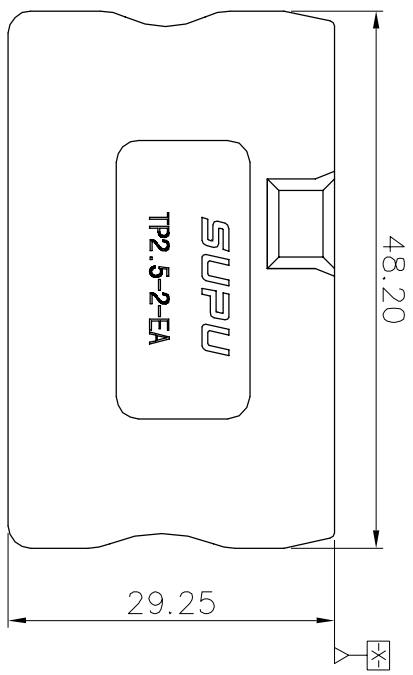


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

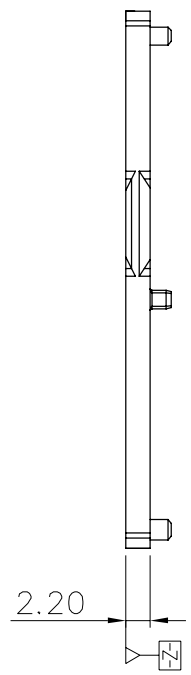

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

NOTES:
Material:
Insulator PA66 UL94 V-0

General information:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Operating temperature: -40°C~+105°C
3.RoHS Compliance
4.Undimensioned Tolerances:

Pitch Range in mm	Nominal Dimension		Range		Tolerance
	Over	In	Over	Over	
6	TO	10	TO	TO	0.1/10
10	TO	24	TO	TO	∠
15	TO	30	TO	TO	∠
20	TO	60	TO	TO	∠
25	TO	100	TO	TO	∠
30	TO	150	TO	TO	∠

HOW TO ORDER:
TP2.5-2-XX-EA
Series No. Series No. Color: GY: Grey BU: Blue OG: Orange

订货号 Order No.	TP2.5-2-XX-EA	名称 Name	TP系列直插式弹簧 2.5mm"两通道盖板	公差 Tolerance	表面处理 Surface
项目 Item	签字 Signature	图号 Drawing No.	/	见公差表	VDI21
设计 Design	陈杰松 Chen Jiesong	材料 Material	见NOTES	阶段标记 Progress	版本 Revision
审核 Check	陈武 Chen Wu	物料号 Item No.		M	0
工艺 Process	-				
标准化 Unity	-				
批准 Approve	梁文龙 Liang Wenlong	日期 Date	11/25/19"		

借通用件登记 Common Part	原图号 Old Draw. No.	底图总号 Assembly No.
-----------------------	----------------------	----------------------

1 2 3 4 5 6 7 8

NINGBO SUPU ELECTRONICS CO., LTD.
宁波速普电子有限公司