

Piezo Buzzer




SL11 Series




FEATURES:

- High output
- High efficiency
- Long life

DIMENSIONS: (Unit: mm)



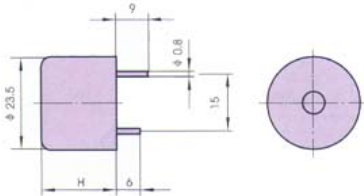


PIN(P) type

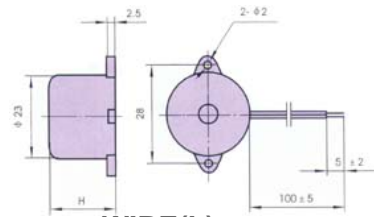

WIRE(L) type

CHARACTERISTICS:

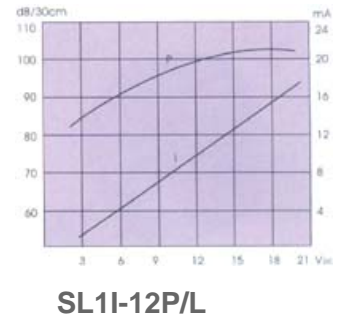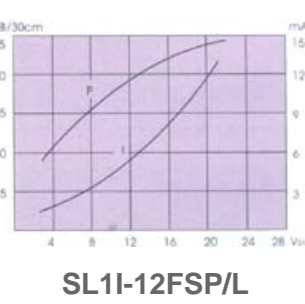

ELECTRICAL SPECIFICATIONS :

Model No.	SL11-03(03C)P/L	SL11-06(06C)P/L	SL11-09(09C)P/L	SL11-12(12C)P/L
Min.Sound Pressure Level (dB)	80(78)/3V _{DC} /30cm	83/6V _{DC} /30cm	85/9V _{DC} /30cm	88(87)/12V _{DC} /30cm
Rated Voltage (V _{DC})	3	6	9	12
Operating Voltage (V _{DC})	2 ~ 5	4.5 ~ 9	6 ~ 12	1 ~ 18
Max. Consumption (mA)	25 /3V _{DC}	15 /6V _{DC}	15 /9V _{DC}	15(18) /12V _{DC}
Oscillating Frequency (kHz)	3.3 ± 0.5 (3.4 ± 0.5)			
Tone Nature	Continuous			
Height (H) (mm)	19(16)			
Operating Temperature (°C)	-20 ~ +70			
Weight (g)	8(6)			
Case Material/Colour	ABS/Black			
Model No.	SL11-12HP/12HL	SL11-12FSP/L	SL11-24P/L	SL11-48P/L
Min.Sound Pressure Level (dB)	91 /12V _{DC} /30 cm	85 /12V _{DC} /30 cm	90 /24V _{DC} /30 cm	88 /48V _{DC} /30 cm
Rated Voltage (V _{DC})	12	12	24	48
Operating Voltage (V _{DC})	3 ~ 20	3 ~ 20	18 ~ 28	38 ~ 58
Max. Consumption (mA)	10 /12V _{DC}	10 /12V _{DC}	20 /24V _{DC}	18 /48V _{DC}
Oscillating Frequency (kHz)	3.7 ± 0.5	2.9 ± 0.5	3.4 ± 0.5	3.3 ± 0.5
Tone Nature	Continuous			
Height (H) (mm)	16	17	19	19
Operating Temperature (°C)	-20 ~ +70			
Weight (g)	6		7	
Case Material/Colour	PC/Black		ABS/Black	

PACKING INFORMATION :

Model No.	P TYPE	L TYPE
Packing :	1600 pcs per export carton	2000 pcs per export carton
Carton Size :	47 X 30.5 X 33 cm	47 X 30.5 X 25 cm
G. Weight :	13.3 kgs	17 kgs
N. Weight :	11.5kgs	15.5kgs