


Screw clamping terminal block- UKJ- W2.5/TC- 431016

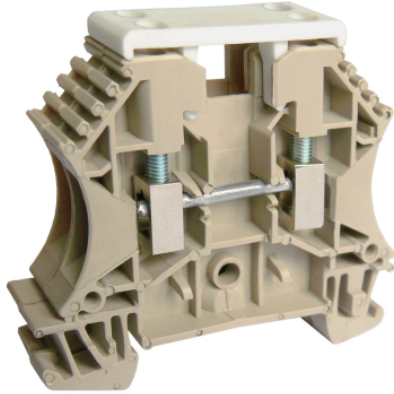

Screw clamping terminal block , rated voltage:55V , Max. operating current:1A, connection method : screw connection , number of connections : 2 , crimping range : 0.5mm² -2.5mm² , thickness:10.4mm , height:50.5mm , color : khaki , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Layers	1
Number of connections	2
Rated cross section(mm ²)	2.5
Color	khaki
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	55
Rated current(A)	1
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	10
Tightening torque	0.6-0.8Nm
Solid conductors(mm ²)	0.5-2.5
Stranded conductors(mm ²)	0.5-2.5
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	60
Thickness(mm)	10.4
Height(mm)	50.5