



Category: 插拔式端子-插座/Plug-in terminal-plug

Product name: MC-PHH7.62HXX-F0030

Product Description: 7.62mm , 630V , 41A CE

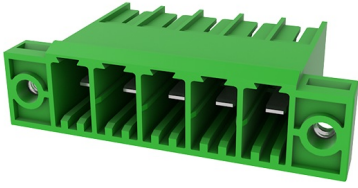

Product Picture

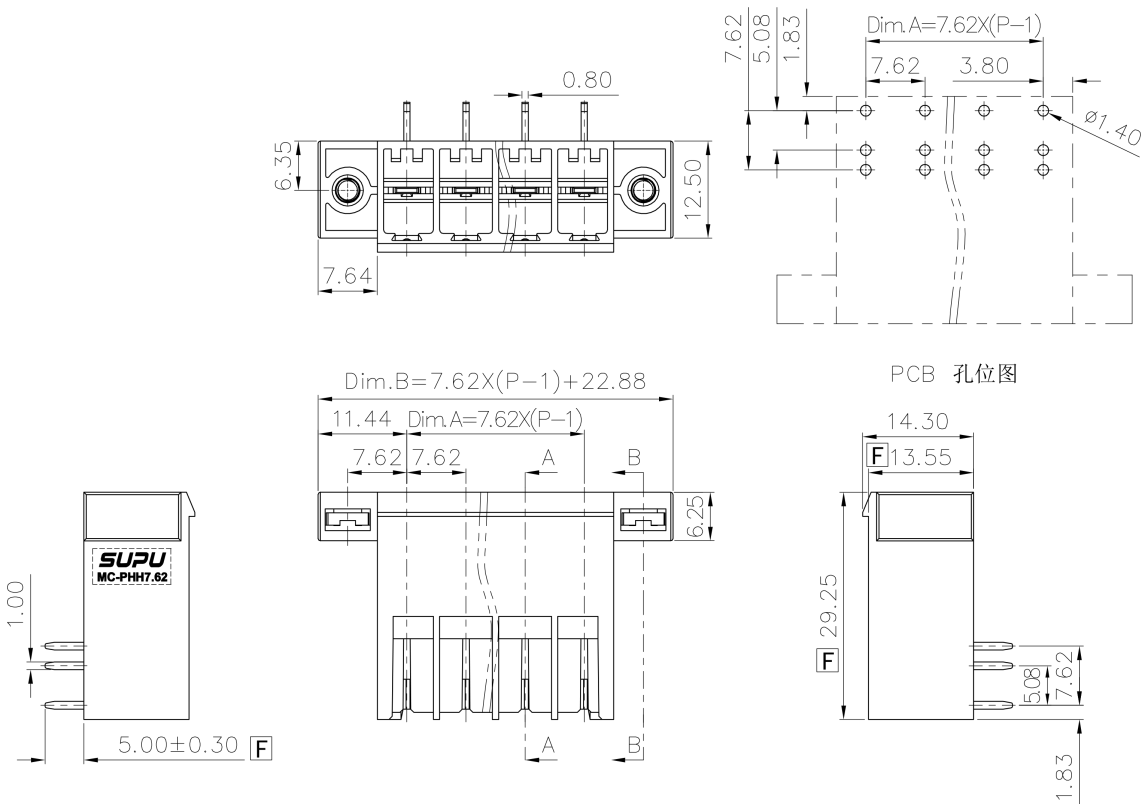

基本信息 /Basic Information

产品型号 SUPU ID	MC-PHH7.62HXX-F0030
产品间距 Pitch	7.62mm
产品层数 Number of levels	1
产品位数 Number of connections	2P-12P
接线方式 Connection method	-
防护等级 Protection Level	IP20

工作温度 Work temperature	-40~+105°C
--------------------------	------------

IEC数据 /IEC Data

额定电流 Rated Current	41A		
额定电压 Rated Voltage	630V		
过压类别 Overvoltage category	III	III	II
污染等级 Pollution degree	3	2	2
额定冲击电压 Rated impulse voltage	6KV	6KV	6KV
额定电压 Rated Voltage	630V	630V	1000V
硬导线截面积 Conductor cross section solid	-		
柔性导线截面积 Conductor cross section flexible	-		
柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	-		
锁线螺钉规格 Locking screw Specification	-		
额定扭矩 Rated Torque	-		
固定螺钉规格 Fixed Screw Specification	-		
额定扭矩 Rated Torque	-		
剥线长度 Stripping length	-		

UL数据 /UL Data

使用组别 Use group	B	C	D
额定电流 Rated Current	41A	41A	10A
额定电压 Rated Voltage	300V	150V	300V

额定接线容量
Rated cross section -

材料信息 /Material Data

绝缘材料
Insulation material PA66

绝缘材料组别
Insulation material group I

阻燃等级，符合UL94
Flame retardant grade, UL94 compliance V0

导体材料
Contact material Copper alloy

导体表面镀层
Surface characteristics Sn,Plated

产品认证 /Product Certification

认证图标
Certificate



UL证书号
UL file No.

VDE证书号
VDE No.

TUV证书号
TUV No.

包装信息 /Packing Data

包装信息
Packaging information 25pc

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

File date : 2025-02-12 14:02

Product Entry : 2023-09-28

The right to modify data belongs to
Supu.