



PLASTIC-ENCAPSULATE VOLTAGE REGULATORS

FEATURES


- Maximum Output Current  $I_o$ : 0.1 A
- Output Voltage  $V_o$ : 3.3; 5; 6; 8; 9; 10; 12; 15; 18; 20; 24V
- Thermal Overload Protection
- Short Circuit Protection
- No External Components Are Required
- Continuous Total Dissipation  
 $P_D$ : 0.60 W ( $T_a = 25\text{ }^\circ\text{C}$ )
- Surface Mount device

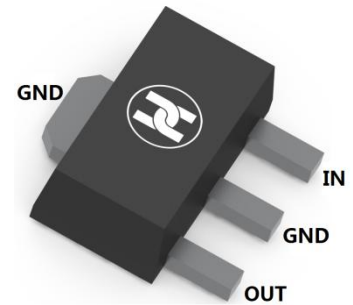

SCHEMATIC DIAGRAM

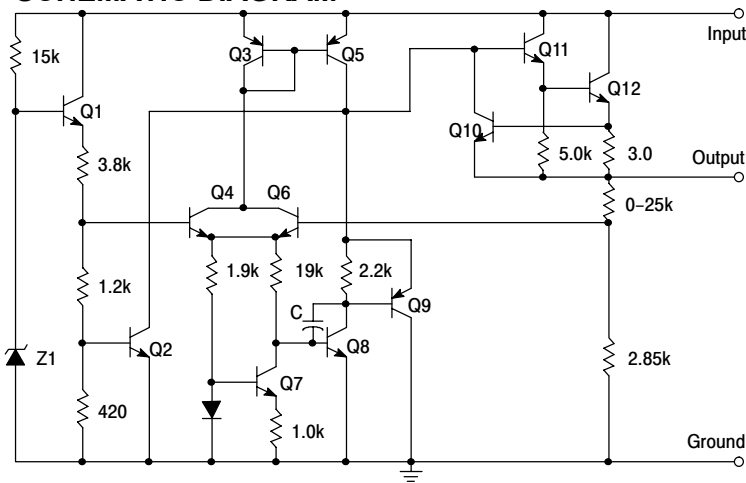

SOT-89

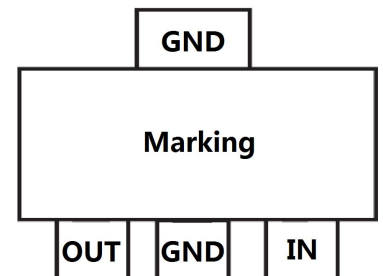


MECHANICAL DATA

- Case: SOT-89
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Weight: 0.055 grams (approximate)
- Marking: 78L05-78L33

MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

| Parameter                                   | Symbol          | Value                          | Unit               |   |
|---|-----------------|--------------------------------|--------------------|---|
| Input Voltage                               | $V_i$           | $V_o=3.3\text{V to }9\text{V}$ | 30                 | V |
|   |                 | $V_o=12\text{V to }15\text{V}$ | 35                 | V |
|   |                 | $V_o=18\text{V to }24\text{V}$ | 40                 | V |
| Power Dissipation                           | $P_D$           | 600                            | mW                 |   |
| Thermal Resistance from Junction to Ambient | $R_{\theta JA}$ | 160                            | $^\circ\text{C/W}$ |   |
| Operating Temperature                       | $T_{opr}$       | -40~+125                       | $^\circ\text{C}$   |   |
| Storage Temperature Range                   | $T_{STG}$       | -55 ~+150                      | $^\circ\text{C}$   |   |

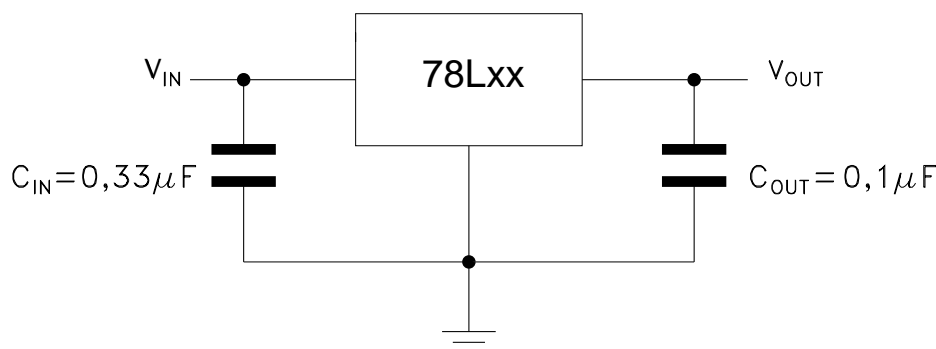**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**TEST CIRCUIT**


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

**ELECTRICAL CHARACTERISTICS OF 78L05 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions  |
|--------------------------|--------------|------|-----|------|-------------|---|
| Output voltage           | $V_o$        | 4.80 | 5.0 | 5.20 | V           | $T_J=+25^\circ C$   |
|                          |              | 4.75 | 5.0 | 5.25 | V           | $7V \leq V_i \leq 20V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 4.75 | 5.0 | 5.25 | V           | $7V \leq V_i \leq 20V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
| Load Regulation          | $\Delta V_o$ |      | 15  | 60   | mV          | $I_o=1mA \sim 100mA, T_J=+25^\circ C$   |
|                          |              |      | 8   | 30   | mV          | $I_o=1mA \sim 40mA, T_J=+25^\circ C$  |
| Line regulation          | $\Delta V_o$ |      | 32  | 150  | mV          | $7V \leq V_i \leq 20V$  |
|                          |              |      | 26  | 100  | mV          | $8V \leq V_i \leq 20V, T_J=+25^\circ C$   |
| Quiescent Current        | $I_q$        |      | 3.8 | 6    | mA          | $T_J=+25^\circ C$   |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $8V \leq V_i \leq 20V, -25^\circ C \leq T_J \leq +125^\circ C$                  |
|                          |              |      |     | 0.1  | mA          | $1mA \leq I_i \leq 40mA, -25^\circ C \leq T_J \leq +125^\circ C$                |
| Output Noise Voltage     | $V_N$        |      | 42  |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$                                      |
| Ripple Rejection         | RR           | 41   | 49  |      | dB          | $8V \leq V_i \leq 20V, f=120Hz, -25^\circ C \leq T_J \leq +125^\circ C$         |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$   |

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L06 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions  |
|--------------------------|--------------|------|-----|------|-------------|---|
| Output voltage           | $V_o$        | 5.75 | 6.0 | 6.25 | V           | $T_J=+25^\circ C$   |
|                          |              | 5.7  | 6.0 | 6.3  | V           | $8V \leq V_i \leq 20V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 5.7  | 6.0 | 6.3  | V           | $8V \leq V_i \leq 20V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
| Load Regulation          | $\Delta V_o$ |      | 16  | 80   | mV          | $I_o=1mA \sim 100mA, T_J=+25^\circ C$   |
|                          |              |      | 9   | 40   | mV          | $I_o=1mA \sim 40mA, T_J=+25^\circ C$  |
| Line regulation          | $\Delta V_o$ |      | 35  | 175  | mV          | $8V \leq V_i \leq 20V$  |
|                          |              |      | 29  | 125  | mV          | $9V \leq V_i \leq 20V, T_J=+25^\circ C$   |
| Quiescent Current        | $I_q$        |      | 3.9 | 6    | mA          | $T_J=+25^\circ C$   |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $9V \leq V_i \leq 20V, 0^\circ C \leq T_J \leq +125^\circ C$                    |
|                          |              |      |     | 0.1  | mA          | $1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$                  |
| Output Noise Voltage     | $V_N$        |      | 46  |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$                                      |
| Ripple Rejection         | RR           | 40   | 48  |      | dB          | $9V \leq V_i \leq 19V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$           |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$   |

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L08 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min | Typ | Max | Unit        | Conditions   |
|--------------------------|--------------|-----|-----|-----|-------------|--|
| Output voltage           | $V_o$        | 7.7 | 8.0 | 8.3 | V           | $T_J=+25^\circ C$  |
|                          |              | 7.6 | 8.0 | 8.4 | V           | $10.5V \leq V_i \leq 23V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 7.6 | 8.0 | 8.4 | V           | $10.5V \leq V_i \leq 23V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
| Load Regulation          | $\Delta V_o$ |     | 18  | 80  | mV          | $I_o=1mA \sim 100mA, T_J=+25^\circ C$  |
|                          |              |     | 10  | 40  | mV          | $I_o=1mA \sim 40mA, T_J=+25^\circ C$   |
| Line regulation          | $\Delta V_o$ |     | 42  | 175 | mV          | $10.5V \leq V_i \leq 23V$  |
|                          |              |     | 36  | 125 | mV          | $11V \leq V_i \leq 23V, T_J=+25^\circ C$   |
| Quiescent Current        | $I_q$        |     | 4   | 6   | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |     |     | 1.5 | mA          | $11V \leq V_i \leq 23V, 0^\circ C \leq T_J \leq +125^\circ C$                      |
|                          |              |     |     | 0.1 | mA          | $1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$                     |
| Output Noise Voltage     | $V_N$        |     | 54  |     | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$   |
| Ripple Rejection         | RR           | 37  | 46  |     | dB          | $13V \leq V_i \leq 23V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$             |
| Dropout Voltage          | $V_d$        |     | 1.7 |     | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L09 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=16V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions   |
|--------------------------|--------------|------|-----|------|-------------|--|
| Output voltage           | $V_o$        | 8.64 | 9.0 | 9.36 | V           | $T_J=+25^\circ C$  |
|                          |              | 8.55 | 9.0 | 9.45 | V           | $12V \leq V_i \leq 24V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 8.55 | 9.0 | 9.45 | V           | $12V \leq V_i \leq 24V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
| Load Regulation          | $\Delta V_o$ |      | 19  | 90   | mV          | $I_o=1mA \sim 100mA, T_J=+25^\circ C$  |
|                          |              |      | 11  | 40   | mV          | $I_o=1mA \sim 40mA, T_J=+25^\circ C$   |
| Line regulation          | $\Delta V_o$ |      | 45  | 175  | mV          | $12V \leq V_i \leq 24V$  |
|                          |              |      | 40  | 125  | mV          | $13V \leq V_i \leq 24V, T_J=+25^\circ C$   |
| Quiescent Current        | $I_q$        |      | 4.1 | 6.0  | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $13V \leq V_i \leq 24V, 0^\circ C \leq T_J \leq +125^\circ C$                    |
|                          |              |      |     | 0.1  | mA          | $1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$                   |
| Output Noise Voltage     | $V_N$        | 58   |     |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$                                       |
| Ripple Rejection         | RR           |      | 45  |      | dB          | $15V \leq V_i \leq 25V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$           |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L10 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=16V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min | Typ | Max  | Unit        | Conditions   |
|--------------------------|--------------|-----|-----|------|-------------|--|
| Output voltage           | $V_o$        | 9.2 | 10  | 10.8 | V           | $T_J=+25^\circ C$  |
|                          |              | 9   | 10  | 11   | V           | $12.5V \leq V_i \leq 23V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 9   | 10  | 11   | V           | $V_i=16V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$                 |
| Load Regulation          | $\Delta V_o$ |     | 21  | 80   | mV          | $I_o=1mA \sim 100mA, T_J=+25^\circ C$  |
|                          |              |     | 12  | 40   | mV          | $I_o=1mA \sim 40mA, T_J=+25^\circ C$   |
| Line regulation          | $\Delta V_o$ |     | 50  | 230  | mV          | $12.5V \leq V_i \leq 23V, T_J=+25^\circ C$   |
|                          |              |     | 45  | 170  | mV          | $13V \leq V_i \leq 23V, T_J=+25^\circ C$   |
| Quiescent Current        | $I_q$        |     | 4.1 | 6.0  | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |     |     | 1.5  | mA          | $13V \leq V_i \leq 23V, 0^\circ C \leq T_J \leq +125^\circ C$                      |
|                          |              |     |     | 0.1  | mA          | $1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$                     |
| Output Noise Voltage     | $V_N$        |     | 60  |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$   |
| Ripple Rejection         | RR           | 37  | 45  |      | dB          | $14V \leq V_i \leq 23V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$             |
| Dropout Voltage          | $V_d$        |     | 1.7 |      | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L12 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=19V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions   |
|--------------------------|--------------|------|-----|------|-------------|--|
| Output voltage           | $V_o$        | 11.5 | 12  | 12.5 | V           | $T_J=+25^\circ C$  |
|                          |              | 11.4 | 12  | 12.6 | V           | $14V \leq V_i \leq 27V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 11.4 | 12  | 12.6 | V           | $14V \leq V_i \leq 27V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
| Load Regulation          | $\Delta V_o$ |      | 22  | 100  | mV          | $I_o=1mA \sim 100mA, T_J=+25^\circ C$  |
|                          |              |      | 13  | 50   | mV          | $I_o=1mA \sim 40mA, T_J=+25^\circ C$   |
| Line regulation          | $\Delta V_o$ |      | 55  | 250  | mV          | $14.5V \leq V_i \leq 27V$  |
|                          |              |      | 49  | 200  | mV          | $16V \leq V_i \leq 27V, T_J=+25^\circ C$   |
| Quiescent Current        | $I_q$        |      | 4.3 | 6.5  | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $16V \leq V_i \leq 27V, 0^\circ C \leq T_J \leq +125^\circ C$                    |
|                          |              |      |     | 0.1  | mA          | $1mA \leq I_o \leq 40mA, 0^\circ C \leq T_J \leq +125^\circ C$                   |
| Output Noise Voltage     | $V_N$        |      | 70  |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$                                       |
| Ripple Rejection         | RR           | 37   | 42  |      | dB          | $15V \leq V_i \leq 25V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$           |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L15 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=23V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min   | Typ | Max   | Unit        | Conditions   |
|--------------------------|--------------|-------|-----|-------|-------------|--|
| Output voltage           | $V_o$        | 14.4  | 15  | 15.6  | V           | $T_J=+25^\circ C$  |
|                          |              | 14.25 | 15  | 15.75 | V           | $17.5V \leq V_i \leq 30V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 14.25 | 15  | 15.75 | V           | $V_i=23V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$                 |
| Load Regulation          | $\Delta V_o$ |       | 25  | 150   | mV          | $V_i=23V, I_o=1mA \sim 100mA, T_J=25^\circ C$                                      |
|                          |              |       | 15  | 75    | mV          | $V_i=23V, I_o=1mA \sim 40mA, T_J=25^\circ C$                                       |
| Line regulation          | $\Delta V_o$ |       | 65  | 300   | mV          | $17.5V \leq V_i \leq 30V, I_o=40mA, T_J=25^\circ C$                                |
|                          |              |       | 58  | 250   | mV          | $19V \leq V_i \leq 30V, I_o=40mA, T_J=25^\circ C$                                  |
| Quiescent Current        | $I_q$        |       | 4.6 | 6.5   | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |       |     | 1.5   | mA          | $19V \leq V_i \leq 30V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$            |
|                          |              |       |     | 0.1   | mA          | $1mA \leq I_o \leq 40mA, V_i=23V, 0^\circ C \leq T_J \leq +125^\circ C$            |
| Output Noise Voltage     | $V_N$        |       | 82  |       | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$   |
| Ripple Rejection         | RR           | 34    | 39  |       | dB          | $18.5V \leq V_i \leq 28.5V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$         |
| Dropout Voltage          | $V_d$        |       | 1.7 |       | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L18 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=26V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions   |
|--------------------------|--------------|------|-----|------|-------------|--|
| Output voltage           | $V_o$        | 17.3 | 18  | 18.7 | V           | $T_J=+25^\circ C$  |
|                          |              | 17.1 | 18  | 18.9 | V           | $20.5V \leq V_i \leq 33V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 17.1 | 18  | 18.9 | V           | $V_i=26V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$                 |
| Load Regulation          | $\Delta V_o$ |      | 27  | 180  | mV          | $V_i=26V, I_o=1mA \sim 100mA, T_J=25^\circ C$                                      |
|                          |              |      | 19  | 90   | mV          | $V_i=26V, I_o=1mA \sim 40mA, T_J=25^\circ C$                                       |
| Line regulation          | $\Delta V_o$ |      | 70  | 360  | mV          | $20.5V \leq V_i \leq 33V, I_o=40mA, T_J=25^\circ C$                                |
|                          |              |      | 64  | 300  | mV          | $22V \leq V_i \leq 33V, I_o=40mA, T_J=25^\circ C$                                  |
| Quiescent Current        | $I_q$        |      | 4.7 | 6.5  | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $22V \leq V_i \leq 33V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$            |
|                          |              |      |     | 0.1  | mA          | $1mA \leq I_o \leq 40mA, V_i=26V, 0^\circ C \leq T_J \leq +125^\circ C$            |
| Output Noise Voltage     | $V_N$        |      | 89  |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$   |
| Ripple Rejection         | RR           | 32   | 36  |      | dB          | $21.5V \leq V_i \leq 31.5V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$         |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L20 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=29V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions   |
|--------------------------|--------------|------|-----|------|-------------|--|
| Output voltage           | $V_o$        | 18.4 | 20  | 21.6 | V           | $T_J=+25^\circ C$  |
|                          |              | 18   | 20  | 22   | V           | $24V \leq V_i \leq 33V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 18   | 20  | 22   | V           | $V_i=29V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$               |
| Load Regulation          | $\Delta V_o$ |      | 29  | 180  | mV          | $V_i=29V, I_o=1mA \sim 100mA, T_J=25^\circ C$                                    |
|                          |              |      | 17  | 90   | mV          | $V_i=29V, I_o=1mA \sim 40mA, T_J=25^\circ C$                                     |
| Line regulation          | $\Delta V_o$ |      | 75  | 330  | mV          | $22.5V \leq V_i \leq 34V, I_o=40mA, T_J=25^\circ C$                              |
|                          |              |      | 70  | 280  | mV          | $24V \leq V_i \leq 34V, I_o=40mA, T_J=25^\circ C$                                |
| Quiescent Current        | $I_q$        |      | 4.7 | 6.5  | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $25V \leq V_i \leq 33V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$          |
|                          |              |      |     | 0.2  | mA          | $1mA \leq I_o \leq 40mA, V_i=26V, 0^\circ C \leq T_J \leq +125^\circ C$          |
| Output Noise Voltage     | $V_N$        |      | 120 |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$                                       |
| Ripple Rejection         | RR           | 31   | 38  |      | dB          | $25V \leq V_i \leq 35V, f=120Hz, 0^\circ C \leq T_J \leq +125^\circ C$           |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**
**ELECTRICAL CHARACTERISTICS OF 78L24 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=33V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**

| Parameter                | Symbol       | Min  | Typ | Max  | Unit        | Conditions   |
|--------------------------|--------------|------|-----|------|-------------|--|
| Output voltage           | $V_o$        | 22.1 | 24  | 25.9 | V           | $T_J=+25^\circ C$  |
|                          |              | 21.6 | 24  | 26.4 | V           | $27V \leq V_i \leq 38V, I_o=1mA \sim 40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
|                          |              | 21.6 | 24  | 26.4 | V           | $V_i=33V, I_o=1mA \sim 70mA, 0^\circ C \leq T_J \leq +125^\circ C$               |
| Load Regulation          | $\Delta V_o$ |      | 29  | 200  | mV          | $V_i=33V, I_o=1mA \sim 100mA, T_J=25^\circ C$                                    |
|                          |              |      | 21  | 100  | mV          | $V_i=33V, I_o=1mA \sim 40mA, T_J=25^\circ C$                                     |
| Line regulation          | $\Delta V_o$ |      | 75  | 350  | mV          | $27V \leq V_i \leq 38V, I_o=40mA, T_J=25^\circ C$                                |
|                          |              |      | 70  | 300  | mV          | $28V \leq V_i \leq 38V, I_o=40mA, T_J=25^\circ C$                                |
| Quiescent Current        | $I_q$        |      | 4.7 | 6.5  | mA          | $T_J=+25^\circ C$  |
| Quiescent Current Change | $\Delta I_q$ |      |     | 1.5  | mA          | $28V \leq V_i \leq 38V, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$          |
|                          |              |      |     | 0.2  | mA          | $1mA \leq I_o \leq 40mA, V_i=33V, 0^\circ C \leq T_J \leq +125^\circ C$          |
| Output Noise Voltage     | $V_N$        |      | 200 |      | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$                                       |
| Ripple Rejection         | RR           | 30   | 37  |      | dB          | $29V \leq V_i \leq 35V, f=120Hz, I_o=40mA, 0^\circ C \leq T_J \leq +125^\circ C$ |
| Dropout Voltage          | $V_d$        |      | 1.7 |      | V           | $T_J=+25^\circ C$  |

\*Pulse Test

**ELECTRICAL CHARACTERISTICS OF 78L33 AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE  
( $V_i=8.3V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )**


| Parameter                | Symbol       | Min   | Typ | Max   | Unit        | Conditions  |
|--------------------------|--------------|-------|-----|-------|-------------|---|
| Output voltage           | $V_o$        | 3.168 | 3.3 | 3.432 | V           | $T_J=+25^\circ C$   |
|                          |              | 3.135 | 3.3 | 3.465 | V           | $5.3V \leq V_i \leq 20V, I_o=1mA \sim 40mA, -40^\circ C \leq T_J \leq +125^\circ C$   |
|                          |              | 3.135 | 3.3 | 3.465 | V           | $V_i=8.3V, I_o=1mA \sim 70mA, -40^\circ C \leq T_J \leq +125^\circ C$                 |
| Load Regulation          | $\Delta V_o$ |       |     | 60    | mV          | $V_i=8.3V, I_o=1mA \sim 100mA, T_J=25^\circ C$  |
|                          |              |       |     | 30    | mV          | $V_i=8.3V, I_o=1mA \sim 40mA, T_J=25^\circ C$   |
| Line regulation          | $\Delta V_o$ |       |     | 150   | mV          | $5.3V \leq V_i \leq 20V, I_o=40mA, T_J=25^\circ C$                                    |
|                          |              |       |     | 100   | mV          | $6.3V \leq V_i \leq 20V, I_o=40mA, T_J=25^\circ C$                                    |
| Quiescent Current        | $I_q$        |       |     | 6     | mA          | $T_J=+25^\circ C$   |
| Quiescent Current Change | $\Delta I_q$ |       |     | 1.5   | mA          | $6.3V \leq V_i \leq 20V, I_o=40mA, -40^\circ C \leq T_J \leq +125^\circ C$            |
|                          |              |       |     | 0.1   | mA          | $1mA \leq I_o \leq 40mA, V_i=8.3V, -40^\circ C \leq T_J \leq +125^\circ C$            |
| Output Noise Voltage     | $V_N$        |       | 40  |       | $\mu V/V_o$ | $10Hz \leq f \leq 100kHz, T_J=+25^\circ C$  |
| Ripple Rejection         | RR           | 41    | 49  |       | dB          | $6.3V \leq V_i \leq 16.3V, f=120Hz, I_o=40mA, -40^\circ C \leq T_J \leq +125^\circ C$ |
| Dropout Voltage          | $V_d$        |       | 1.7 |       | V           | $T_J=+25^\circ C$   |

\*Pulse Test


**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**

**Typical Characteristics**


**Figure 1 : 78L05/12 Output Voltage vs Ambient Temperature**

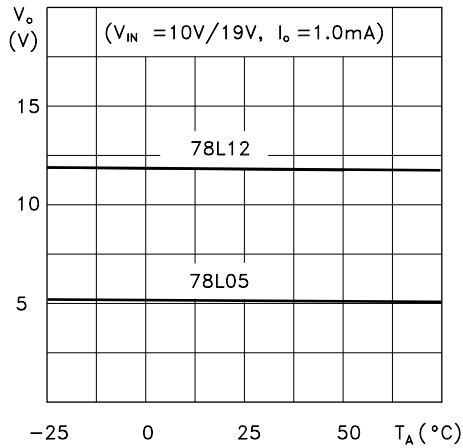


**Figure 4 : 78L05/12 Quiescent Current vs Output Current**

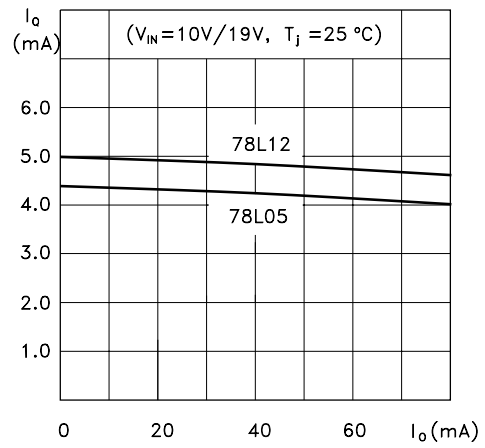


**Figure 2 : 78L05/12/24 Load Characteristics**

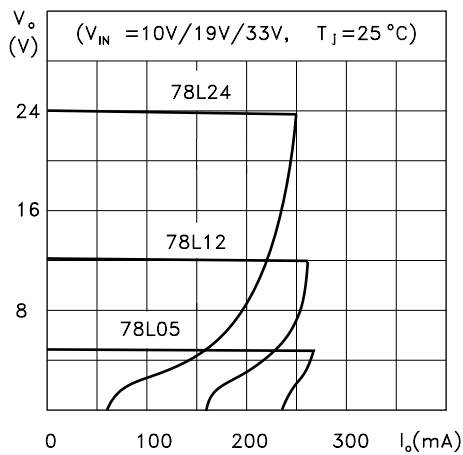


**Figure 5 : 78L05 Quiescent Current vs Input Voltage**

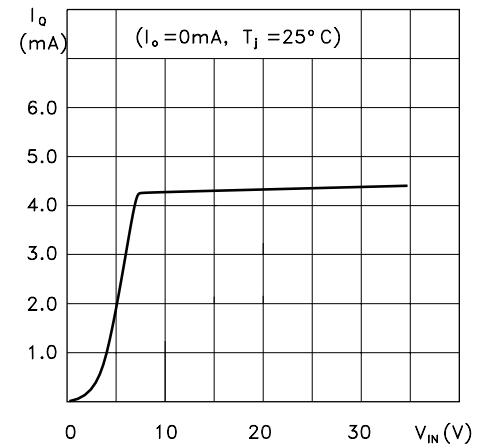

**Figure 3 : 78L05/12/24 Thermal Shutdown**

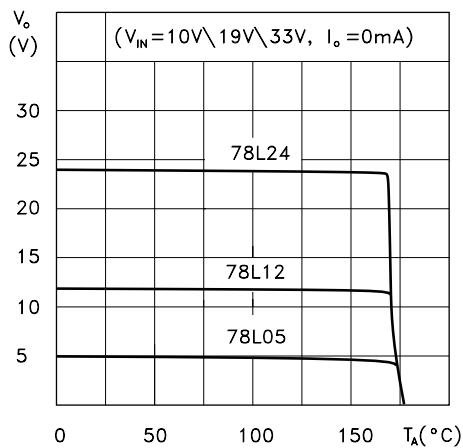


**Figure 6 : 78L05/12/24 Output Characteristics**

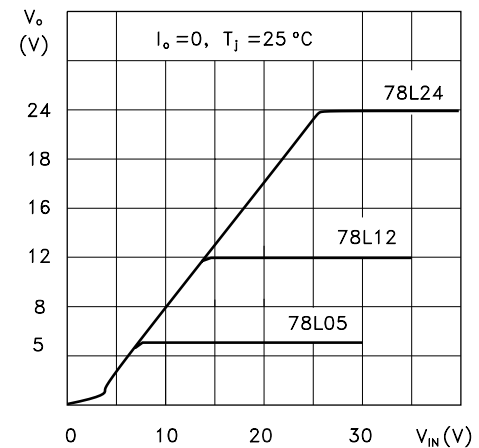




**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**


**Figure 7 : 78L05/12/24RippleRejection**

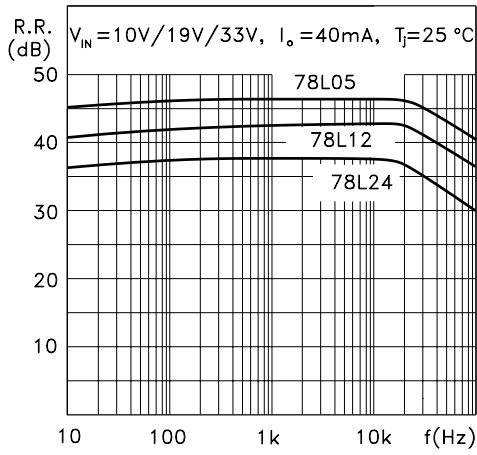

**Figure 9 : 78L00SeriesShortCircuitOutput Current**

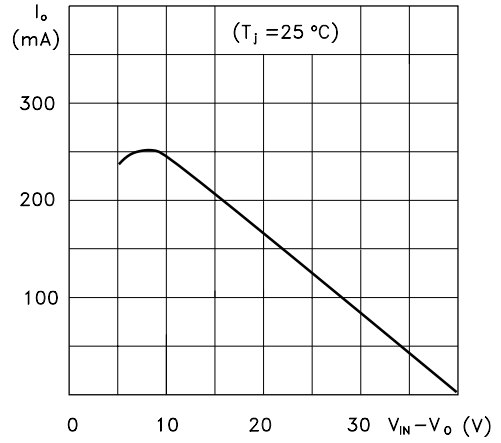


**Figure 8 : 78L05DropoutCharacteristics**

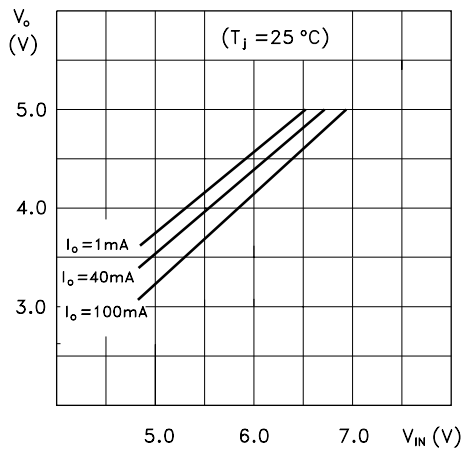


**PLASTIC-ENCAPSULATE VOLTAGE REGULATORS**

**TYPICAL APPLICATION**


**Table 10 : High Output Current Short Circuit Protected**

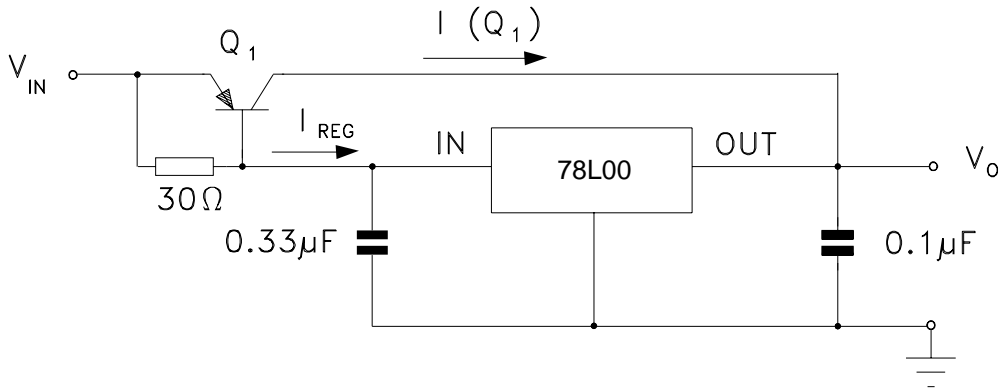


**Figure 11 : Edit Boost Circuit**

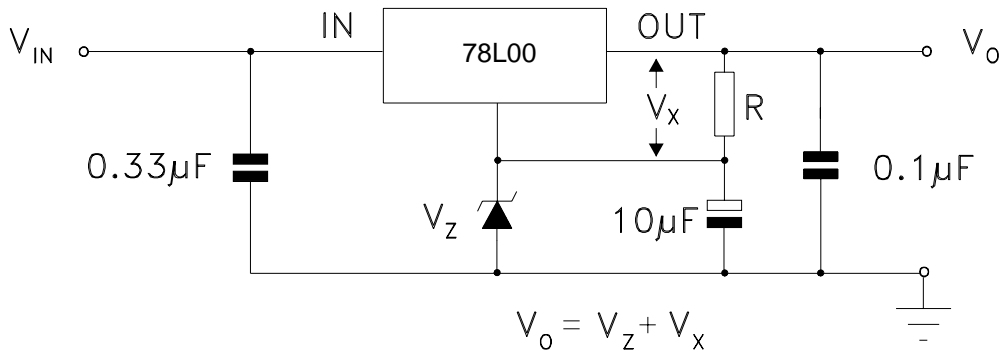

**Figure 12 : Current Regulator**

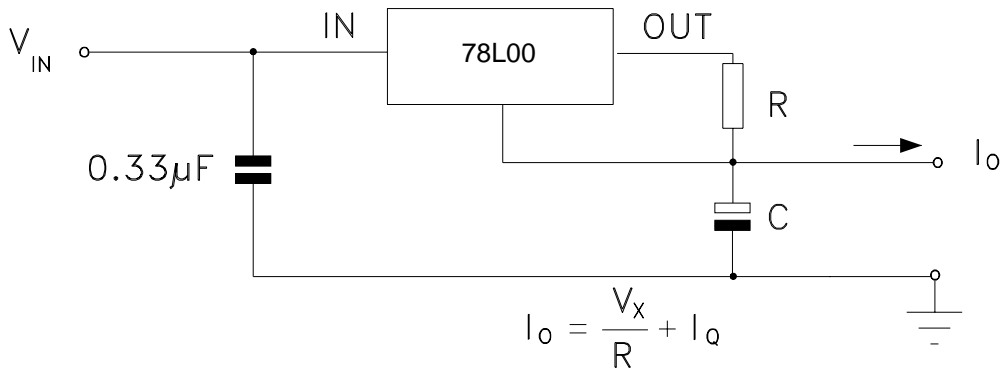


**Figure 13 : Adjustable Output Regulator**

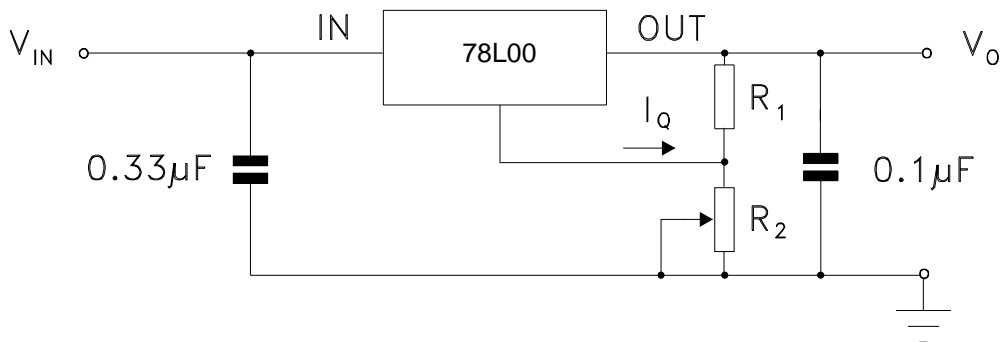


PLASTIC-ENCAPSULATE VOLTAGE REGULATORS

SOT-89 Package Outline Dimensions

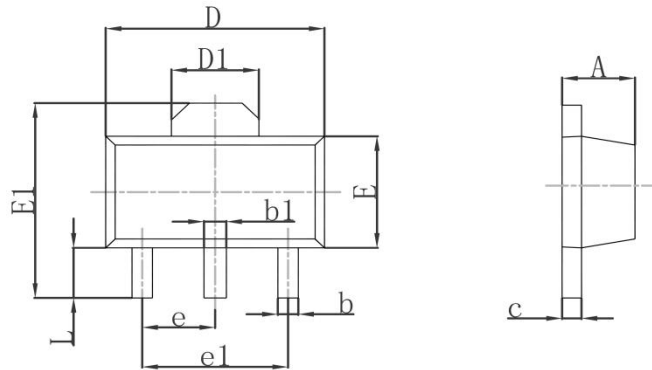

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 1.400                     | 1.600 | 0.055                | 0.063 |
| b      | 0.320                     | 0.520 | 0.013                | 0.020 |
| b1     | 0.400                     | 0.580 | 0.016                | 0.023 |
| c      | 0.350                     | 0.440 | 0.014                | 0.017 |
| D      | 4.400                     | 4.600 | 0.173                | 0.181 |
| D1     | 1.550REF                  |       | 0.061REF             |       |
| E      | 2.300                     | 2.600 | 0.091                | 0.102 |
| E1     | 3.940                     | 4.250 | 0.155                | 0.167 |
| e      | 1.500TYP                  |       | 0.060TYP             |       |
| e1     | 3.000TYP                  |       | 0.118TYP             |       |
| L      | 0.900                     | 1.200 | 0.035                | 0.047 |

SOT-89 Suggested Pad Layout

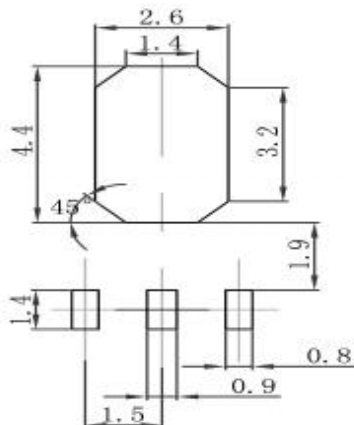


Note:

1. Controlling dimension: in millimeters
2. General tolerance:  $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

PLASTIC-ENCAPSULATE VOLTAGE REGULATORS


SOT-89 Tape and Reel

SOT-89 Embossed Carrier Tape

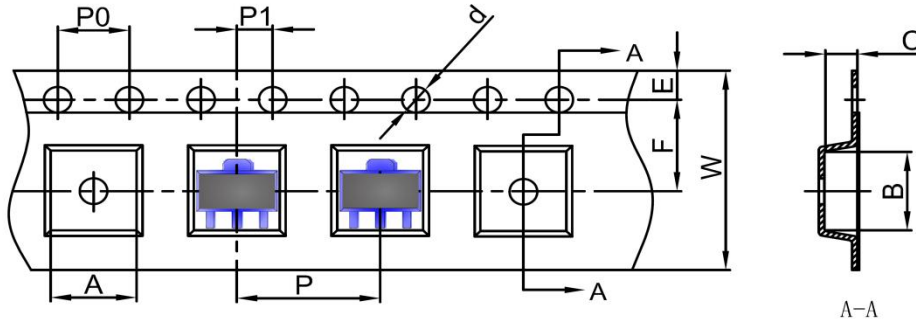


| DIMENSIONS ARE IN MILLIMETER |      |      |      |       |      |      |      |      |      |       |
|------------------------------|------|------|------|-------|------|------|------|------|------|-------|
| TYPE                         | A    | B    | C    | d     | E    | F    | P0   | P    | P1   | W     |
| SOT-89                       | 4.85 | 4.45 | 1.85 | Ø1.50 | 1.75 | 5.50 | 4.00 | 8.00 | 2.00 | 12.00 |
| TOLERANCE                    | ±0.1 | ±0.1 | ±0.1 | ±0.1  | ±0.1 | ±0.1 | ±0.1 | ±0.1 | ±0.1 | ±0.1  |

SOT-89 Tape Leader and Trailer

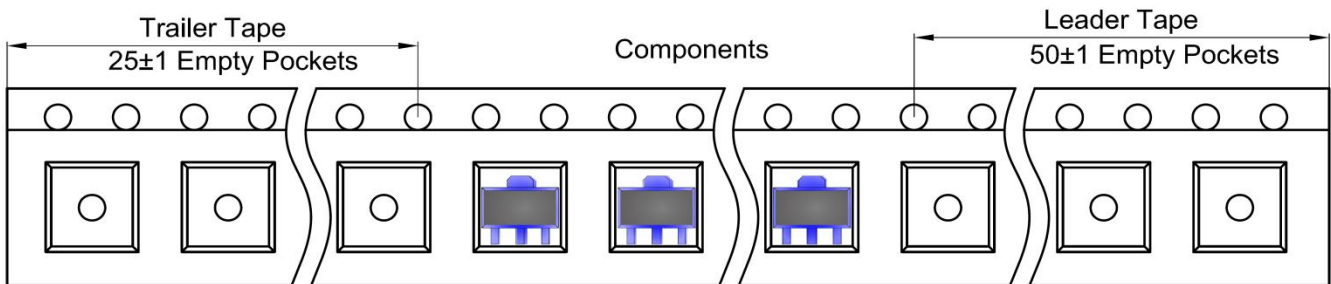

SOT-89 Reel

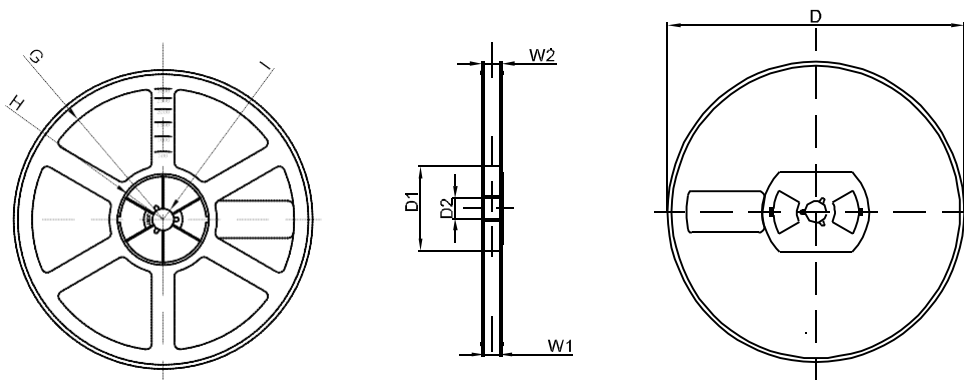

| DIMENSIONS ARE IN MILLIMETER |      |       |       |     |        |       |       |       |
|------------------------------|------|-------|-------|-----|--------|-------|-------|-------|
| REEL OPTION                  | D    | D1    | D2    | G   | H      | I     | W1    | W2    |
| 7" DIA                       | Ø178 | 54.40 | 13.00 | R78 | R25.60 | R6.50 | 13.20 | 16.50 |
| TOLERANCE                    | ±2   | ±1    | ±1    | ±1  | ±1     | ±1    | ±1    | ±1    |