


Screw clamping terminal block-  
UKJ-2.5/2 × 2- 011034





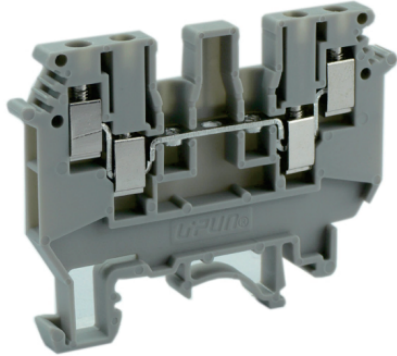

Screw clamping terminal block , rated voltage:500V , Max. operating current:24A, connection method : screw connection , number of connections : 4 , crimping range : 0.2mm<sup>2</sup> -4mm<sup>2</sup> , thickness:5.2mm , height:46.4mm , color : grey , mounting type : TH35-7.5、 TH35-15、 G32-15

Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	0.78
Layers	2
Number of connections	4
Rated cross section(mm <sup>2</sup> )	2.5
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	500
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	<b>CCS</b>
Certification logo	<b>IECEX</b>
Certification logo	<b>cUL<sup>®</sup> US</b>
Certification logo	
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm <sup>2</sup> )	0.2-4
Stranded conductors(mm <sup>2</sup> )	0.2-2.5
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

# Dimension

Parameter	Data
Width(mm)	64
Thickness(mm)	5.2
Height(mm)	46.4