


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

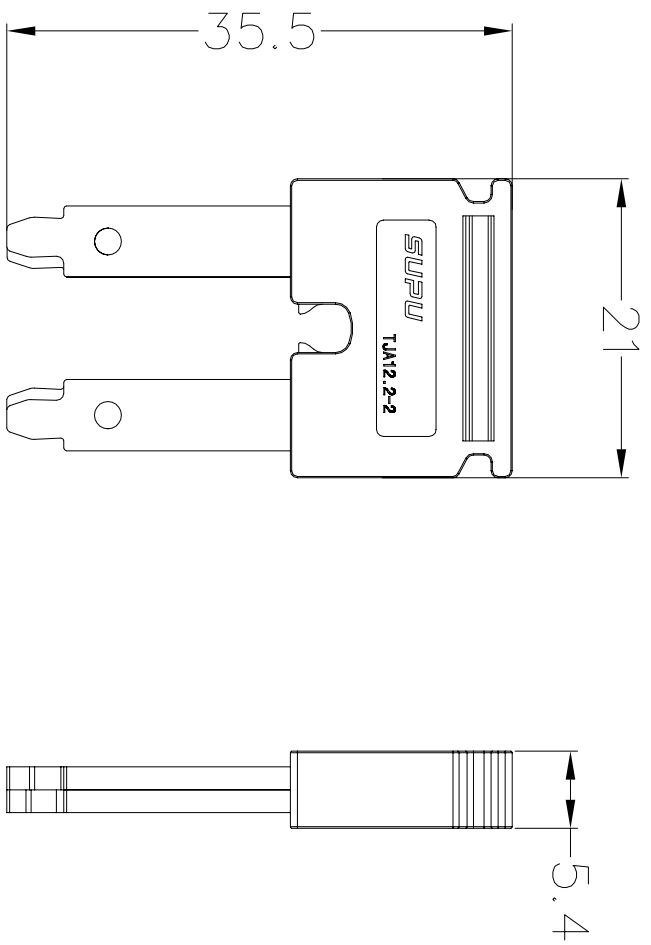

NOTES

IEC Standard

1. Rated Voltage/Current :

Rated current(A)	76
------------------	----

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn plated

General information:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance
- 4.Undimensioned Tolerances:

Pitch Range	Nominal Dimension		Range		Tolerance
	mm	In mm	mm	In mm	
Over	6	10	Over	60	0.1/10
TO	10	24	TO	100	<
6	10	30	60	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±1.00
±1.00	±1.30	±1.30	±1.30	±1.30	±2*

订货号 Order No.	TJA12-2-2	名称 Name	TJA12-2-2跨接件	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	PRM(O)	版本号 Revision Number	VDI21
设计 Design	MXR	材料 Material	Notes	重量 Weight	比例 Scale
审核 Check	DF	物料号 Item No.	412109001	第1页/共1页 1 of 1	1:1
工艺 Process	-	批准 Approve			
标准化 Unity	-				
批准 批注	LWL				
	05/20/22"				

1 2 3 4 5 6 7 8

宁波德普电子有限公司
 NINGBO SUPU ELECTRONICS CO., LTD.