


Screw clamping terminal block-UKJ-W4-431002



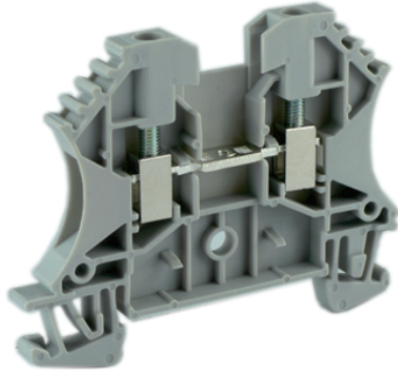

Screw clamping terminal block , rated voltage:800V , Max. operating current:32A, connection method : screw connection , number of connections : 2 , crimping range : 0.5mm<sup>2</sup> -6mm<sup>2</sup> , thickness:6.2mm , height:46.6mm , color : grey , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	0.54
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	6
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	800
Rated current(A)	32
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	<b>IECEX</b>
Certification logo	<b>c UL<sup>®</sup> US</b>
Certification logo	<b>INMETRO</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	10
Tightening torque	0.6-0.8Nm
Solid conductors(mm <sup>2</sup> )	0.5-6
Stranded conductors(mm <sup>2</sup> )	1.5-4
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	60
Thickness(mm)c	6.2
Height(mm)	46.6