


SIM Pin Assignments	
Pin No.	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I / O

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.15	X. ±5°	UNITS	Micro SIM CONN;PUSH,6Pin,H1.42mm
.X ±0.03	.X ±3°	SHEET SIZE	
.XX ±0.05	.XX ±2°	KLS P/N:	

Draw by:	Jenny	Date:	2018-03-10
Check by:		Date:	2018-03-10
SCALE		SHEET	1 OF 1

KLS
 NingBo KLS ELECTRONIC CO.,L TD.

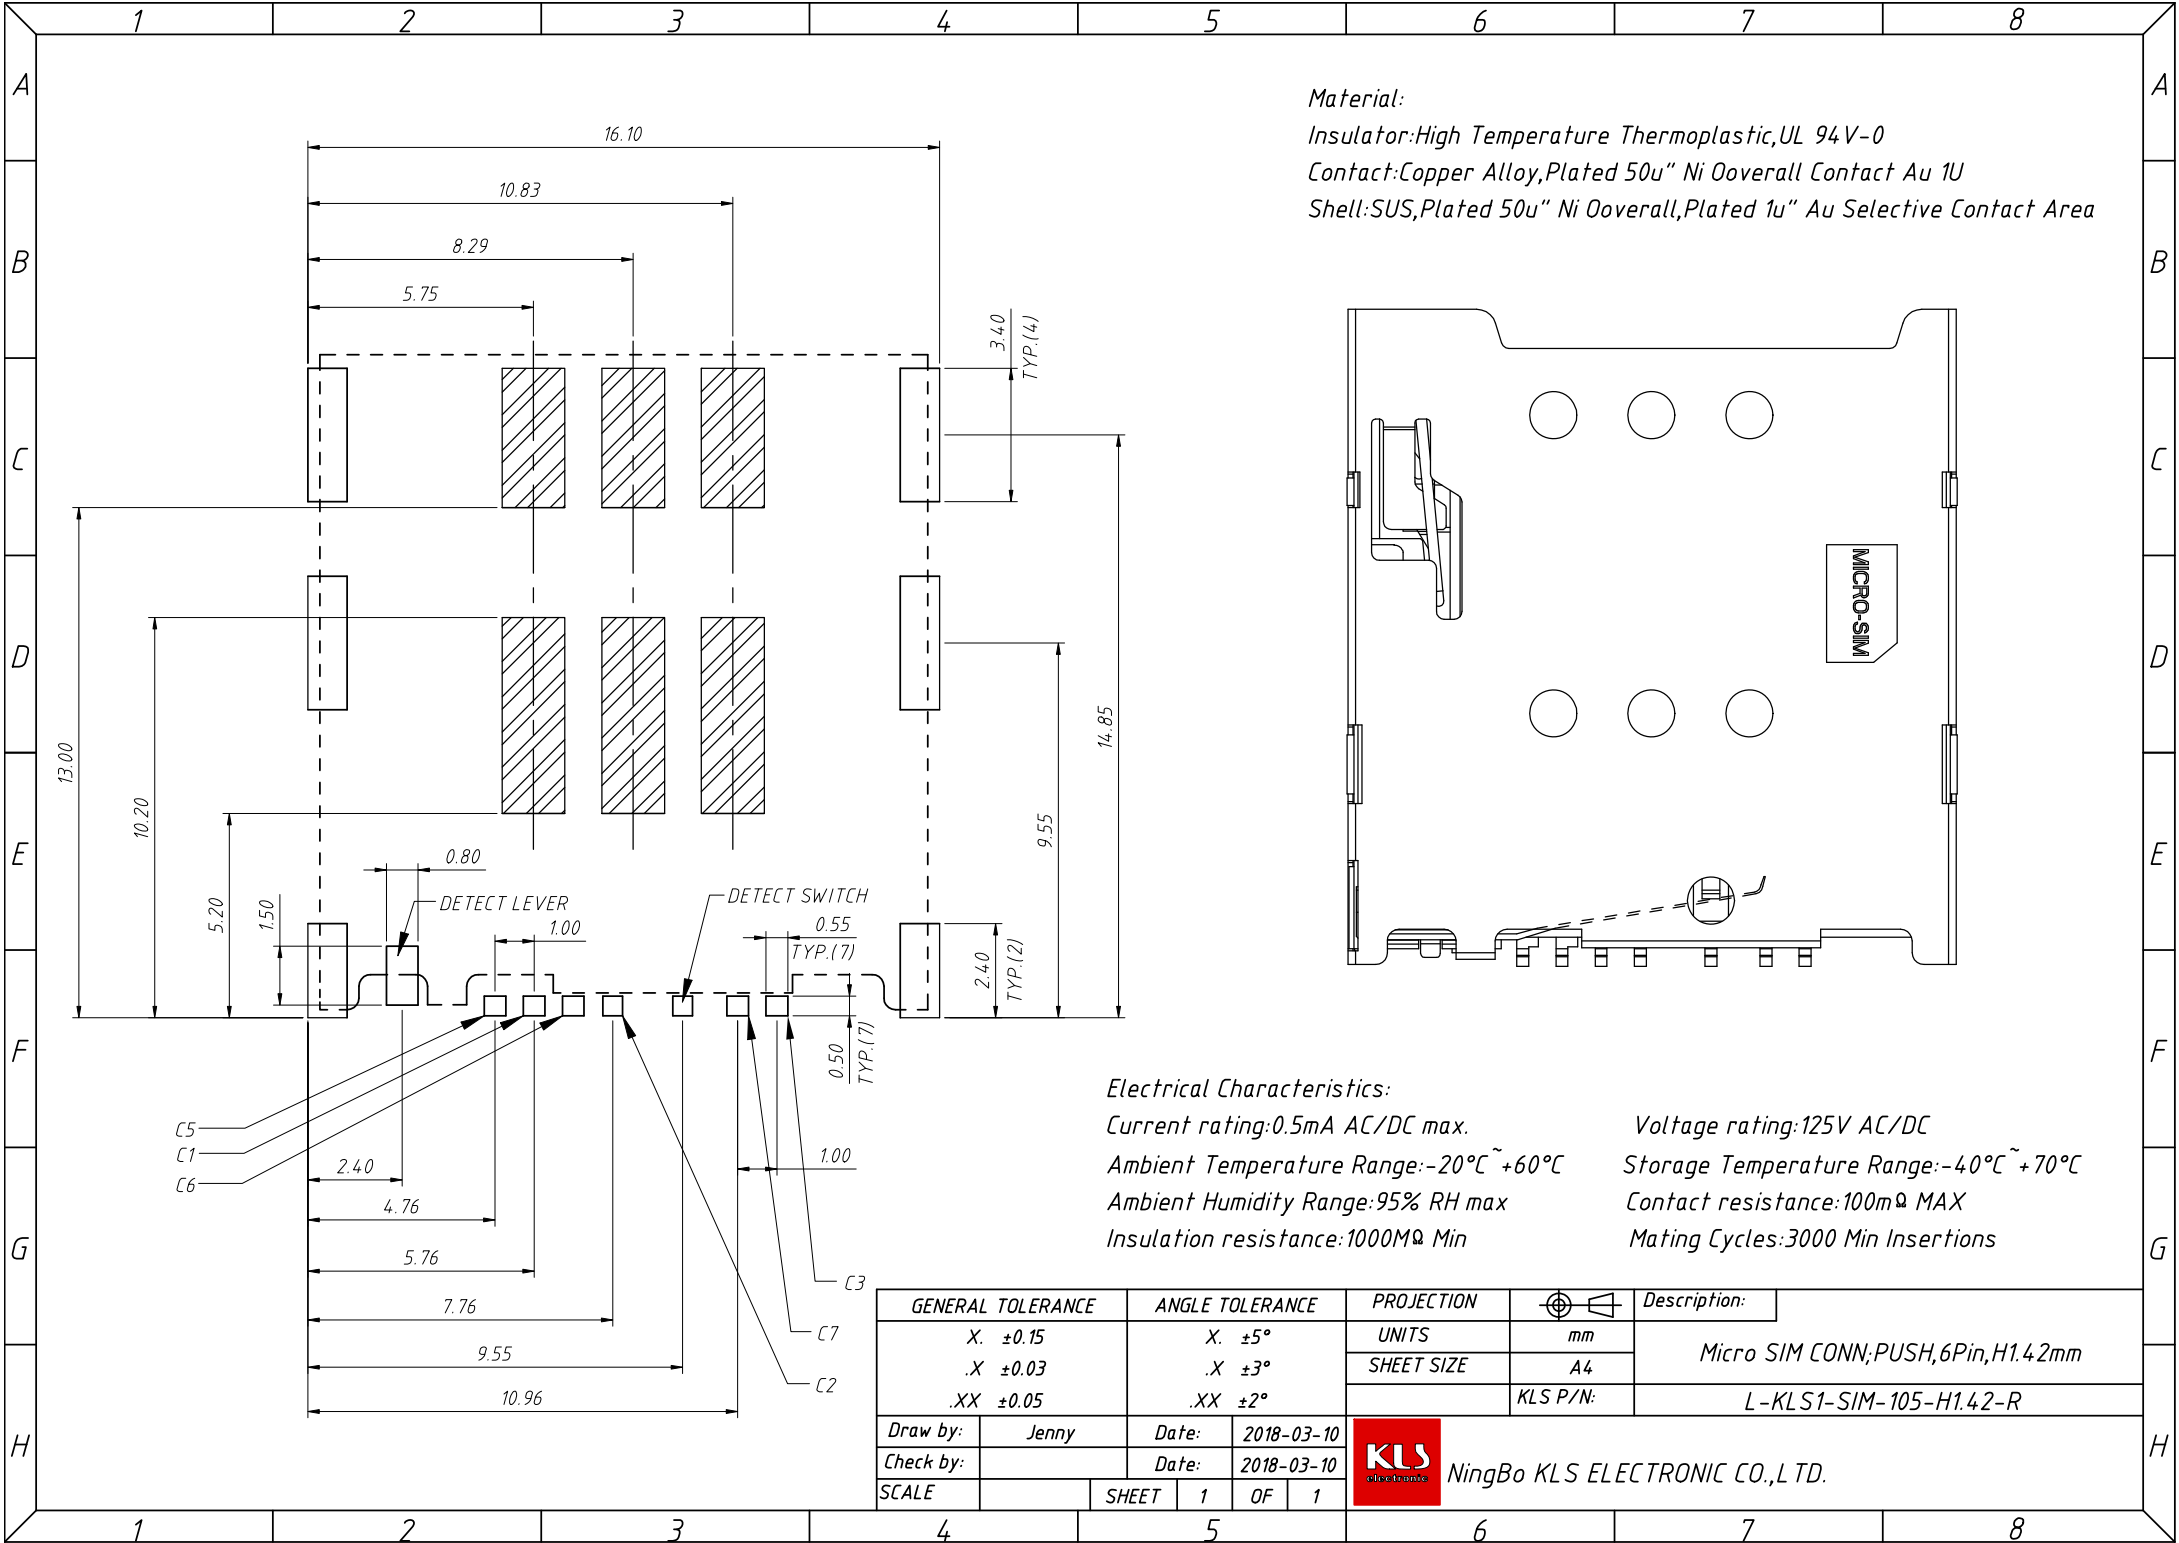

Material:
 Insulator: High Temperature Thermoplastic, UL 94V-0
 Contact: Copper Alloy, Plated 50u" Ni Overall Contact Au 1U
 Shell: SUS, Plated 50u" Ni Overall, Plated 1u" Au Selective Contact Area

Electrical Characteristics:
 Current rating: 0.5mA AC/DC max.
 Ambient Temperature Range: -20°C ~ +60°C
 Ambient Humidity Range: 95% RH max
 Insulation resistance: 1000MΩ Min
 Voltage rating: 125V AC/DC
 Storage Temperature Range: -40°C ~ +70°C
 Contact resistance: 100mΩ MAX
 Mating Cycles: 3000 Min Insertions

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	Description:
.X	±0.15	.X	±5°	UNITS	Micro SIM CONN; PUSH, 6Pin, H1.42mm L-KLS1-SIM-105-H1.42-R
.X	±0.03	.X	±3°	SHEET SIZE	
.XX	±0.05	.XX	±2°	KLS P/N:	

Draw by: Jenny Date: 2018-03-10
 Check by: Date: 2018-03-10
 SCALE SHEET 1 OF 1

