


REVISION RECORD				
REV	ECN	DESCRIPTION	DRAFT	DATE

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

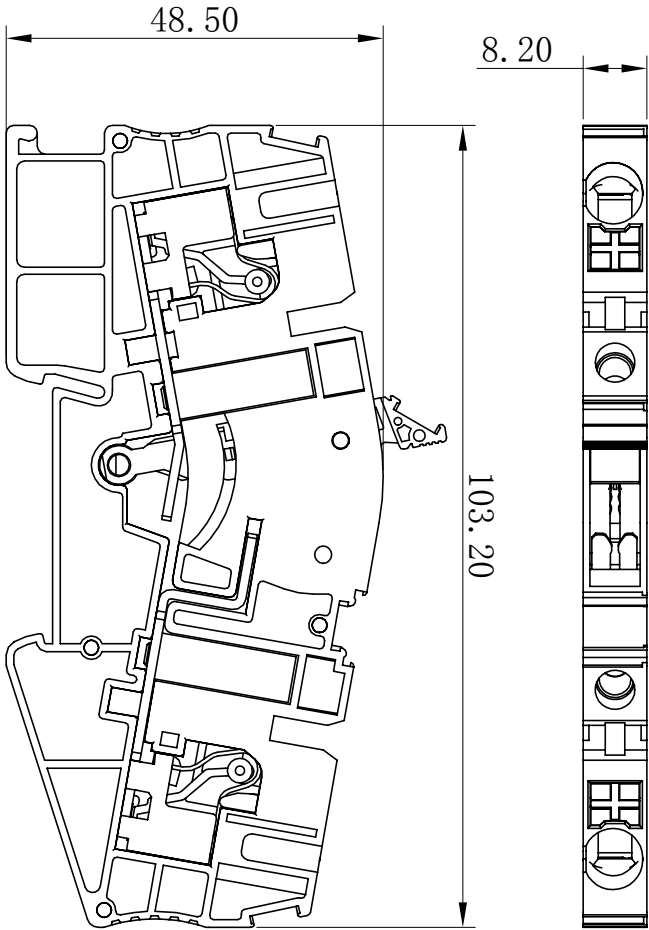

- Connection method:
- For Solid wire, peeling wire in right length, push down the wire.
 - For stranded wire, peeling wire in right length, push down the key & fix the wire, or wire furred and fix then.



HOW TO ORDER:
TPME6-2-XX

Series No. Color:
GY: Grey
BU: Blue
OG: Orange

NOTES:
UL/CUL Standard
1. Conductor cross section : 20~8AWG
2. Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	600	600	
Rated current(A)	30	30	

IEC Standard
1. Conductor cross section :

Wire range(Solid/Stranded)	0.5-6mm ²
Solid	0.5-10mm ²
Stranded	0.5-6mm ²
Stranded with ferrules without plastic sleeve	0.5-6mm ²
Stranded with ferrules with plastic sleeve	0.5-6mm ²

2. Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(KV)	6
Rated voltage(V)	500
Rated current(A)	30

Material:

Insulator	PAGE	UL94 V-0
Conductor	Copper alloy	Sn plated
Spring	Stainless steel	
Button	POM	UL94 V-0

- General information:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Stripping length : 12mm
 - Operating temperature: -40°C~+105°C
 - RoHS Compliance
 - Undimensioned Tolerances:

Pitch Range in mm	Nominal Dimension		Range	
	Over	To	Over	To
6	10	30	60	150
10	10	30	60	150
10	24	30	60	150
±0.15	±0.20	±0.30	±0.50	±1.00

Order No.	TPME6-2-XX	TP系列带闸刀试验端子-02P-6.0mm ² 端子	未注公差 Tolerance	表面 Surface
Item	Signature	DF	Version Number	VDI21
Design	ZTC	03/16/21"	Revision Number	Weight Weight Scale
Check	DF	03/16/21"	M1	1:1
Process	-	-		
Standardization	-	-		
Approval	LWL	03/16/21"		
物料号 Item No.	411522023			
NINGBO SUPU ELECTRONICS CO., LTD.				

1 2 3 4 5 6 7 8