



DIP IC SOCKET PITCH 2.54mm(0.100")

SERIES SCSM, SCLM

No. OF CONTACTS

06 08 14 16 18

20 24 28 32 40

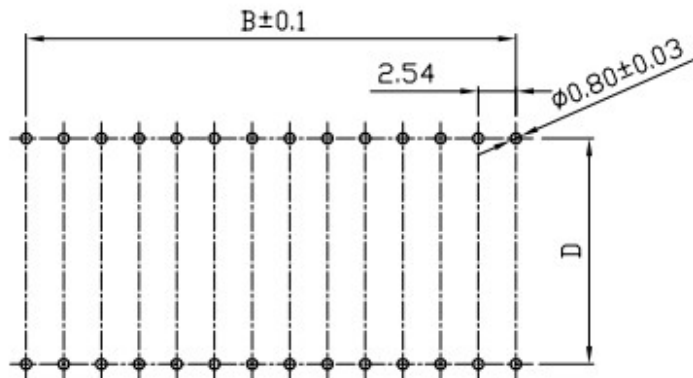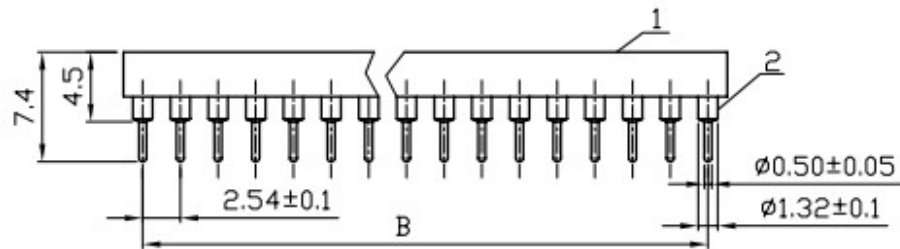

Position	Dimension			
	A±0.5	B±0.3	C	D±0.2
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24

NOTES:

1. ELECTRICAL CHARACTERISTICS:

1.1 CONTACT RESISTANCE: 20mΩ Max.

1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.

1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

2.1 OPERATING TEMPERATURE: 0°C~+85°C.

2.2 STORAGE TEMPERATURE: -20°C~+70°C.

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)