
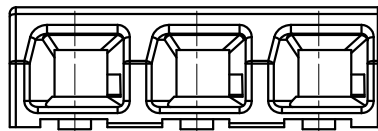


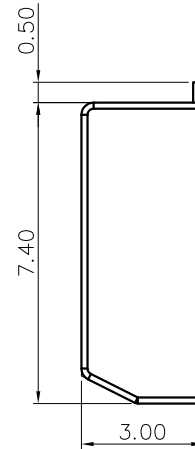
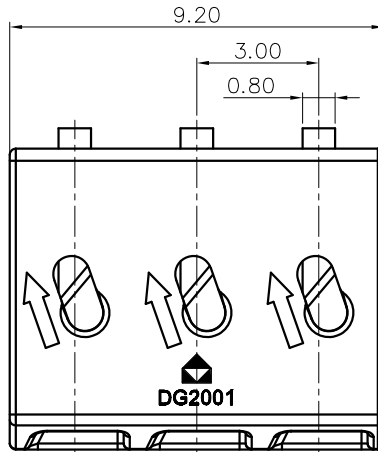
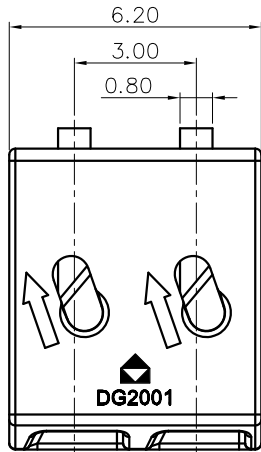


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

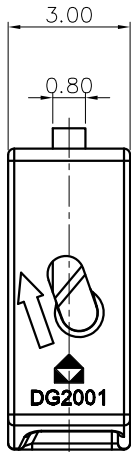

01P

02P

03P

NOTES1:

UL Standard

1. Rated voltage/current : 600V / 3A(01P), 300V / 3A(02P/03P)

2. Wire range : 26~22AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	160V	160V	32V
Rate current(A)	3A		

2. Wire range : 0.14~0.34mm<sup>2</sup>(SOL)

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009

2. Pitch : 3.00mm, Poles : N=01~03P



3. Stripping length : 5.5~6.5mm

4. Operating temperature: -40°C~+130°C

5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				-	∩	∇
TO	Over TO	Over TO	Over TO	Over TO	Over TO	0.1/10		
6	10	10	30	60	100			
	24	30	60	100	150			
		±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30
								±2°

6. RoHS Compliance

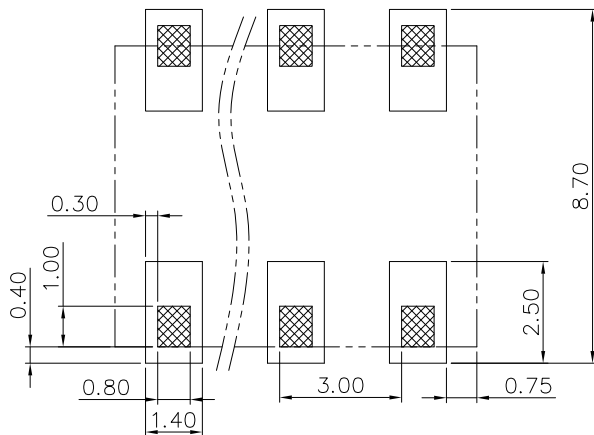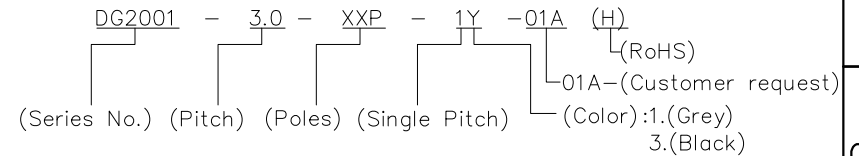

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		DRAWING NO.:		/
		MM (INCH)		DO NOT SCALE DRAWING	
		TITLE: CUSTOMER DRAWING		REV	DO
		SHEET		1/1	
		SCALE		1:1	

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG2001-3.0-XXP-1Y-01A(H)

TITLE: CUSTOMER DRAWING REV DO

DRAWING NO.: / SHEET 1/1

MM (INCH) DO NOT SCALE DRAWING SCALE 1:1