


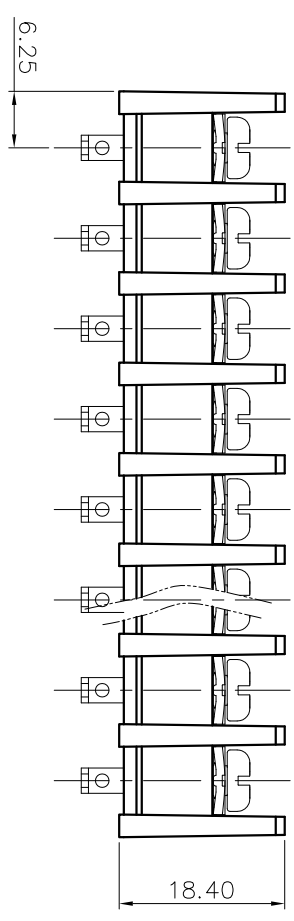



| REVISION RECORD | | | |
|-----------------|-----|-------------|-----------|
| REV | ECN | DESCRIPTION | DRFT DATE |
| | | | |

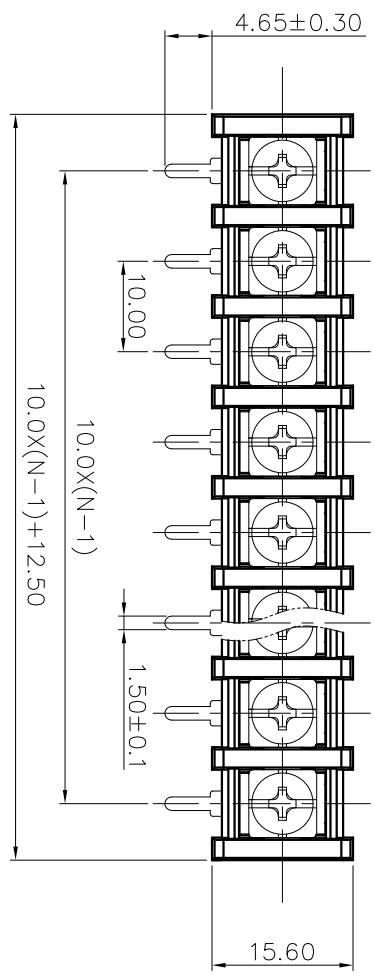


| Pitch range | in | mm | Nominal dimension | range | in | mm |
|-------------|----|----|-------------------|-------|-------|-------|
| Over | 6 | 10 | Over | 60 | 100 | 150 |
| TO | 10 | 24 | TO | 60 | 100 | 150 |
| 6 | 10 | 24 | TO | 30 | 50 | 100 |
| | | | TO | 30 | 50 | 100 |
| | | | ±0.15 | ±0.20 | ±0.30 | ±0.50 |
| | | | ±0.30 | ±0.50 | ±0.70 | ±1.00 |
| | | | ±1.00 | ±1.30 | ±2.0 | |

6. RoHS Compliance

- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 20A
2. Torque value : M4 , 10.53l.b.in
3. Wire range : 22~12AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.0mm, Poles : N=02~24P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

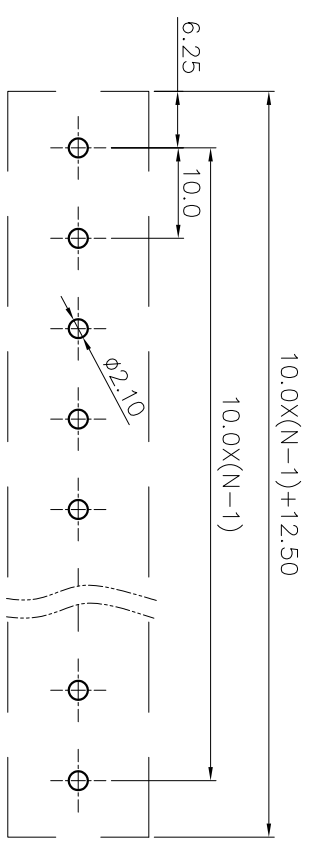

PCB LAYOUT

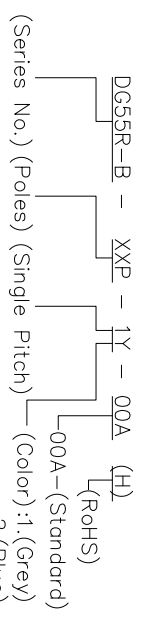

- (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

| DETACHED LISTS | | | |
|------------------------|---|----------------------|---|
| PART NO.: | / | NAME: | DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司 |
| APPD.: | / | DRFT.: | / |
| CHKD.: | / | TITLE: | CUSTOMER DRAWING |
| DRFT.: | / | DRAWING NO.: | / |
| THIRD ANGLE PROJECTION | | DO NOT SCALE DRAWING | SCALE |
| 1 | 2 | 3 | 1 |