


Economical relay module-UDK-PLC-RJI 120Vac/dc E-328047

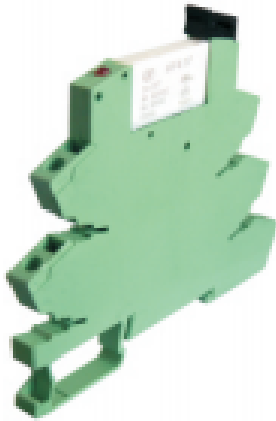

Relay coupling, voltage input: 230V, current input: about 3.5mA, connection methods: screw connection, pollution degree: 2, AWG: 26-14, current output: 6A, width 93mm, thickness 6.2mm, color: grey, mounting rail: TH35-7.5, G32-15

Product parameter

Parameter	Data
Packing unit(pcs)	/
NW per piece(g)	/
Cross section(mm ²)	0.14-2.5
Color	grey
Materials	PA66
Flame retardant rating	V0
Voltage input(V)	120V
Current input(mA)	about 3.5mA
Insulation material temperature	-40°C ~ +125°C
Connection methods	screw connection

Product certification

Parameter	Data
Certification logo	CE
Certification logo	cUL [®] US

Technical data

Parameter	Data
Connection methods	screw connection
Current output (A)	6A
Upper switching voltage (V)	250V
Rated power(W)	140
Coils/contacts	4000V
Contact material	AgNi
Resistive load	1500V
Ambient temperature (°C)	-25°C~+60°C
Storage temperature (Storage/transportation) (°C)	-30°C~+80°C
Relative humidity	5%~85%
Connection in acc. with standard	IEC 60947-5-1
Pollution degree	2

Dimension

Parameter	Data
Width(mm)	93
Thickness(mm)	6.2
Height(mm)	80