



Voltage rating:30V AC/DC
 额定电压:30V AC/DC
 Current rating:0.5A
 额定电流:0.5A
 Contact resistance:≤30mΩ
 接触电阻:≤30mΩ
 Withstanding voltage:≥500V AC/minute
 耐压:≥500V AC/分钟
 insertion and extraction force:3-20N
 插拔力:3-20N
 Temperature range:-30℃-+70℃
 使用温度:-30℃-+70℃
 Life:5000
 寿命:5000

MODEL NO.	PJ-301M-2-	PJ-301M-3-
	NON-THREAD	
DIA	Ø6.0	
SCHEMATIC		
	B:black Y:yellow	

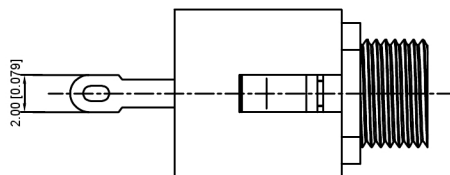

	MATERIAL	PLATING
terminal 2	BRASS	tin
terminal 3	BRASS	tin
terminal 4	Phosphor Bronze	tin
terminal 5	BRASS	
plastic	PA	

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5



DSND	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN	VIEW:	PART NO.: PJ-301M-X-X
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	
XKB INDUSTRIAL PRECISION CO., LIMITED		WEIGHT
		SHEET
		REVIS
		1/1
		A0