

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Barrier Series


KLS2-25A-7.62 Series

Electrical



Voltage rating : 300V
Current rating : 10A
Wire range : 14-22AWG
Operation temperature : -40°C to +105°C
Torque : 4kg/cm
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC2000V/Min

MATERIAL


Housing : PA 66 UL94V-0
Terminal : Brass 0.8t, Tin plated
Screws : M3 Steel, Nickel Plated

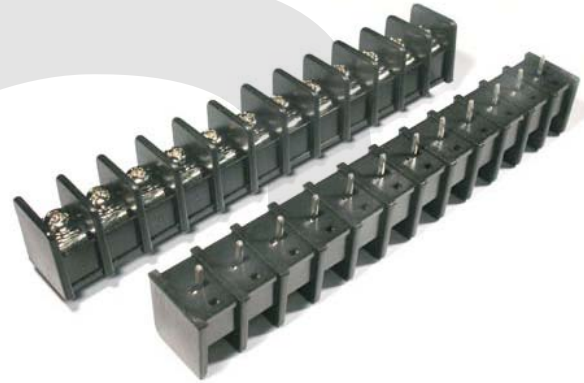

II

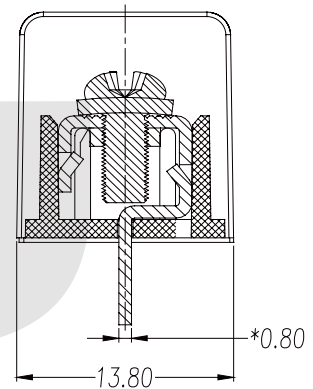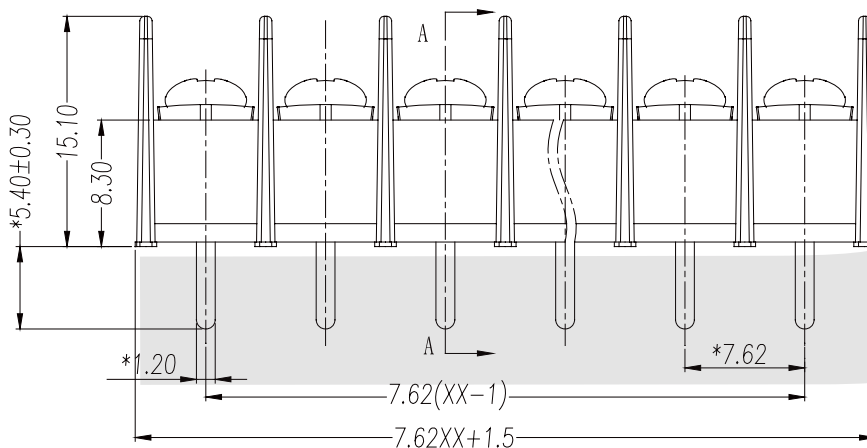

SECTION A-A

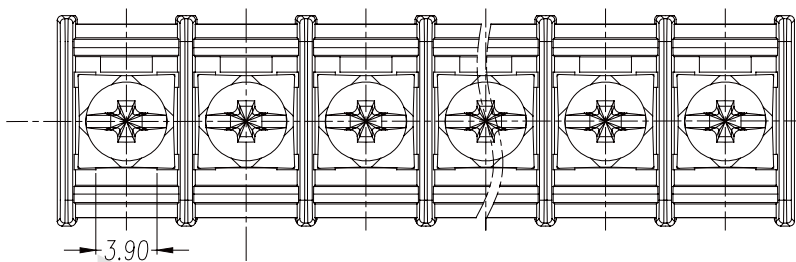

ORDER INFORMATION

Product NO.: KLS2-25A-7.62 XXP B

Pos. NO. _____

Series No. _____

Pitch 7.62=7.62mm _____

A=Mount Ends B=Barrier Ends

Pin Number _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

TERMINAL BLOCK Connector

KLSelectronic
www.cnkls.com

Barrier Series


KLS2-25A-7.62 Series

Electrical


Voltage rating : 300V
Current rating : 10A
Wire range : 14-22AWG
Operation temperature : -40°C to +105°C
Torque : 4kg/cm
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC2000V/Min

MATERIAL

Housing : PA 66 UL94V-0
Terminal : Brass 0.8t, Tin plated
Screws : M3 Steel, Nickel Plated

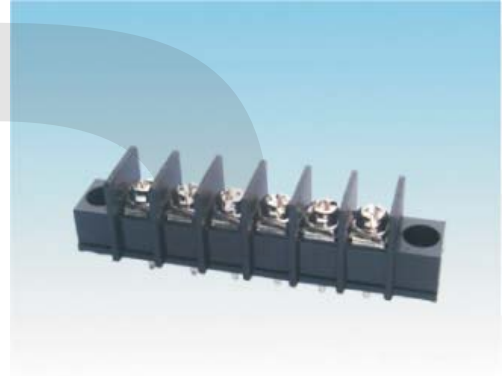

II

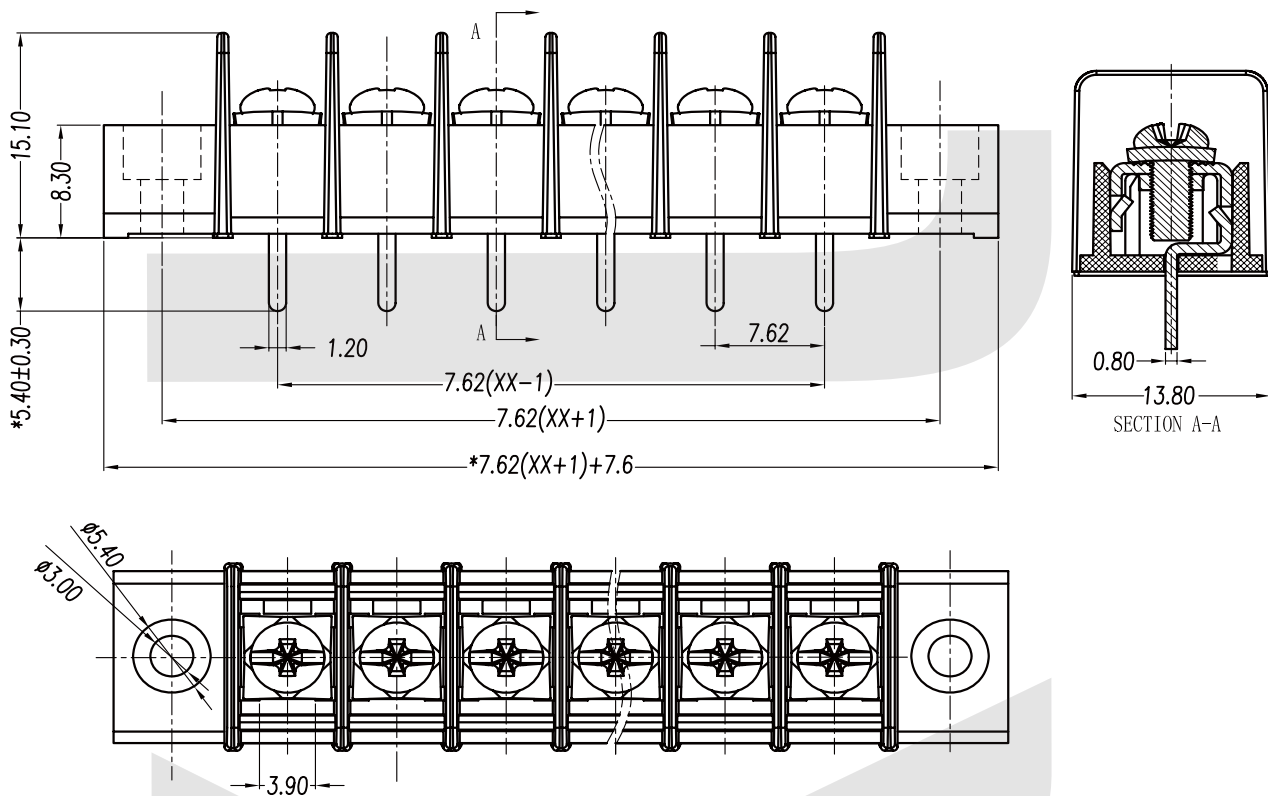

ORDER INFORMATION

Product NO.: KLS2-25A-7.62 XXP A

Pos. NO. _____

Series No. _____

Pitch 7.62=7.62mm _____

A=Mount Ends B=Barrier Ends

Pin Number _____

All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information