



Verpackungsmöglichkeiten:


Ammopack 2.000 St. in der Schachtel
Ammopack 25.000 St. in der Schachtel

Packing options:

Ammo pack 2.000 pcs. per inner box
Ammo pack 25.000 pcs. per inner box.

Bemessungswerte / Ratings

Art.-No.	Strom Current	Spannung Voltage	Ausschaltvermögen Breaking capacity	Spannungsfall Voltage drop max [mV]	Schmelzintegral Melting integral [A ² s]
888.317	1 A	250 V	35 A	280	0,340
888.318	1,25 A	250 V	35 A	280	0,844
888.319	1,6 A	250 V	35 A	250	1,280
888.320	2 A	250 V	35 A	240	2,760
888.321	2,5 A	250 V	35 A	200	3,813
888.322	3,15 A	250 V	35 A	180	4,961
888.323	4 A	250 V	35 A	160	8,800
888.324	5 A	250 V	35 A	150	12,750
888.325	6,3 A	250 V	35 A	150	26,195

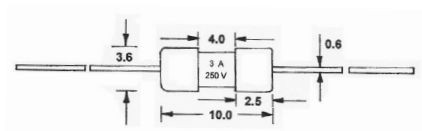

Schmelzzeit-Grenzwert / Pre-arcing time limits

Bemessungsstrom Rated current	1,5 I _{rat} min.	2,1 I _{rat} max.	2,75 I _{rat} min. max.	4 I _{rat} min. max.	10 I _{rat} max.
1A – 6,3 A	1 h	30 min.	10 ms 3 s	3 ms 300 ms	20 ms