


Push-in terminal block -UJ6-2.5/1 × 2JD - 421464

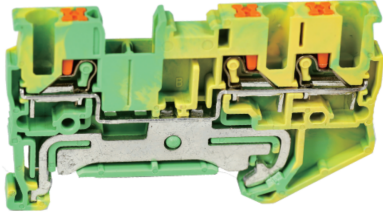

Push-in terminal block, connection method : spring connection , number of connections : 3 , crimping range : 0.2mm<sup>2</sup> -4mm<sup>2</sup> , AWG : 26-12 , thickness:5.2mm , height: 35.2mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	100
NW per piece(g)	10.5
Layers	1
Number of connections	3
Rated cross section(mm <sup>2</sup> )	2.5
Color	yellow-green
Insulation material	PA
Flame retardant grade	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

## Product certification

Parameter	Data
Certification logo	CE
Certification logo	cUL <sup>®</sup> US
Certification logo	RoHS

## Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	13
Solid conductors(mm <sup>2</sup> )	0.2-4
Solid conductors AWG	26-12
Stranded conductors(mm <sup>2</sup> )	0.2-2.5
Stranded conductors AWG	26-14
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +55
Relative humidity	30% ~ 90%

## Dimension

Parameter	Data
Width(mm)	60.4
Thickness(mm)	5.2
Height(mm)	35.2

## Business data

Parameter	Data
0	