


## Data Sheet | Item Number: 222-413


CLASSIC Splicing Connector; for all conductor types; max. 4 mm<sup>2</sup>; 3-conductor;  
with levers; gray housing; Surrounding air temperature: max 40°C; 2,50 mm<sup>2</sup>; gray



<https://www.wago.com/222-413>



Color:  gray

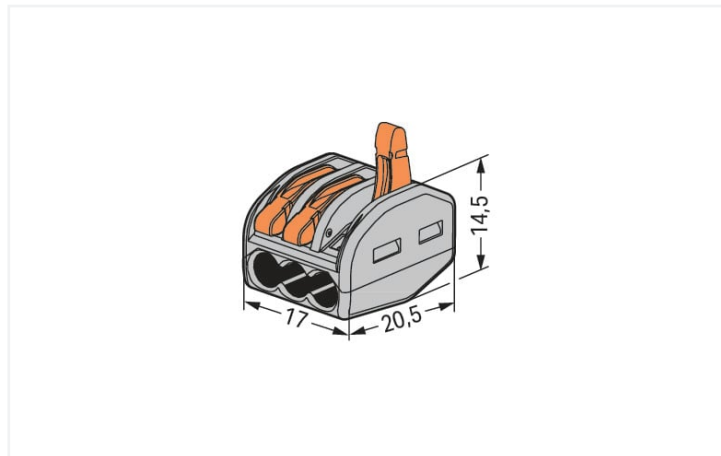

Dimensions in mm

### Electrical data

#### Ratings per IEC/EN

Ratings per	EN 60664
Nominal voltage (II/2)	400 V
Rated surge voltage (II/2)	4 kV
Rated current	32 A
Legend (ratings)	(II / 2) $\triangleq$ Overvoltage category II / Pollution degree 2

### Connection data

Connection points	3
Total number of potentials	1

#### Connection 1

Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Wiring direction	Side-entry wiring

### Material Data

Note (material data)

[Information on material specifications can be found here](#)

Color	gray
Flammability class per UL94	V0
Fire load	0.099 MJ
Actuator color	orange
Weight	4.3 g

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)