
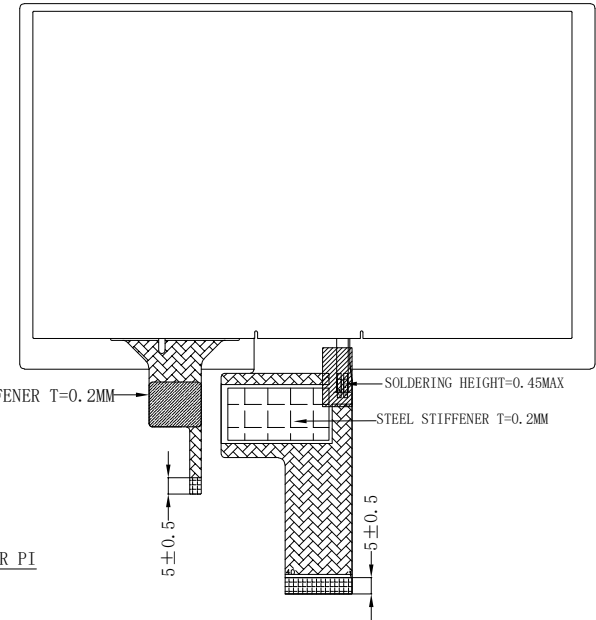


REVISE	Revision note	DATE	NAME
VO	First	2019.01.12	SUKANGYAN



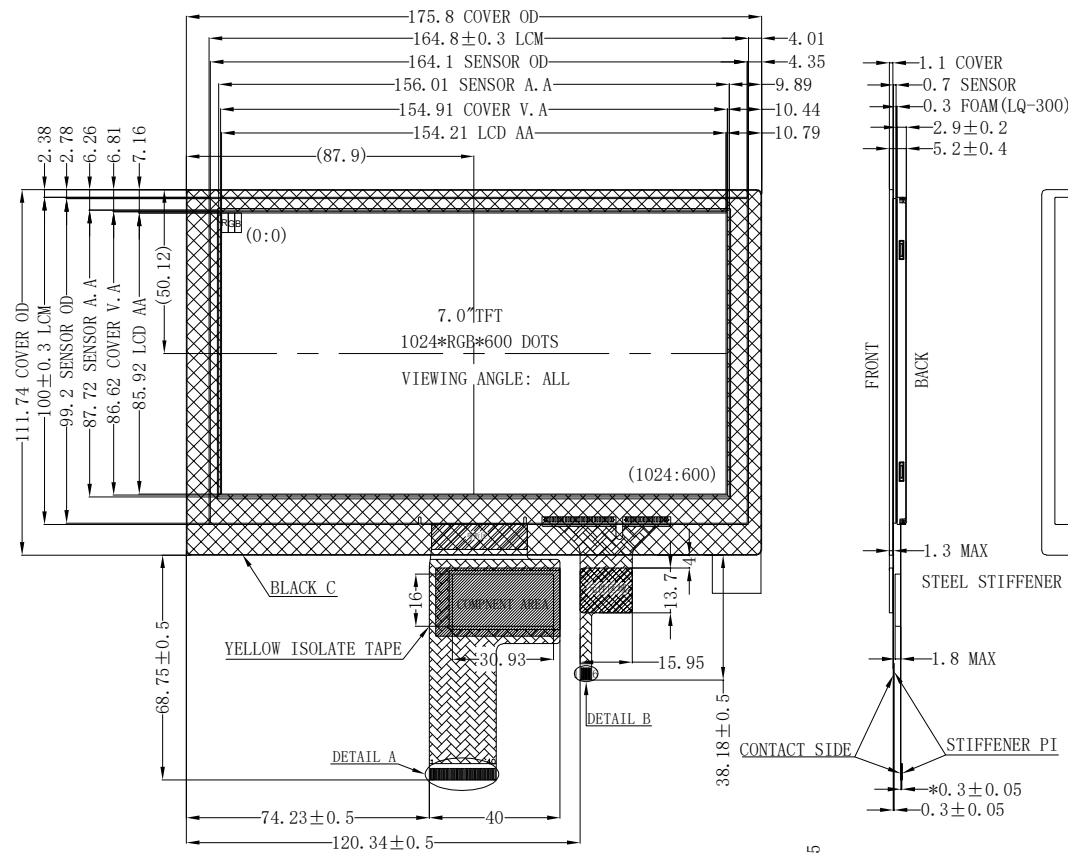


40 PIN FOR LCM

PIN	SYMBOL	PIN FUCTION
1	NC	NC
2	VDD	VDD
3	VDD	VDD
4	NC	NC
5	RESET	RESET
6	STBYB	STBYB
7	GND	GND
8	RXIN0-	RXIN0-
9	RXIN0+	RXIN0+
10	GND	GND
11	RXIN1-	RXIN1-
12	RXIN1+	RXIN1+
13	GND	GND
14	RXIN2-	RXIN2-
15	RXIN2+	RXIN2+
16	GND	GND
17	RXCLKIN-	RXCLKIN-
18	RXCLKIN+	RXCLKIN+
19	GND	GND
20	RXIN3-	RXIN3-
21	RXIN3+	RXIN3+
22	GND	GND
23	NC	NC
24	NC	NC
25	GND	GND
26	NC	NC
27	NC	NC
28	SELB(HSD)	SELB(HSD)
29	NC	NC
30	GND	GND
31	LED-	LED-
32	LED-	LED-
33	L/R	L/R
34	U/D	U/D
35	NC	NC
36	NC	NC
37	NC	NC
38	NC	NC
39	LED+	LED+
40	LED+	LED+


6 PIN FOR CTP

PIN	SYMBOL	PIN FUCTION
1	VDD(3.3V)	VDD(3.3V)
2	SCL	SCL
3	SDA	SDA
4	INT	INT
5	RESET	RESET
6	GND	GND

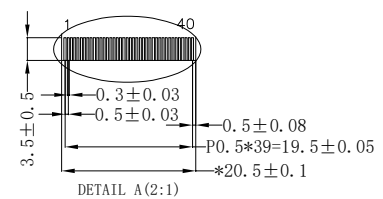

NOTES:

1. DISPLAY TYPE: 7.0" TFT, NORMALLY BLACK
2. VIEWING DIRECTION : U/L/D/R 80/80/80/80
3. Driver IC : HX8282A11/HX8696
4. CTP Driver IC : ILI2117A
5. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
6. GENERAL TOLERANCE: ±0.2
7. LCM Luminance: 450cd/m<sup>2</sup> (Typical)

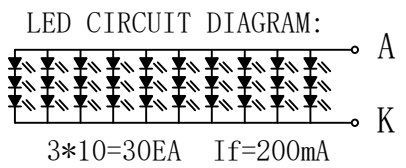

	深圳市德尔西电子有限公司 Disea Electronics Co., LTD	
	<a href="http://www.diseaelec.com">Http://www.diseaelec.com</a>	
Approved By		SIZE: TFT_LCD 7.0"
Checked By		DWARING_NO.: ZW-T070BAHA-19CP
Drawn By	SUKANGYAN	CUSTOMER_NO.
UNIT: mm		

LVDS I/O