



Rev.	Description	Date
A0	New release	2022.05.30

## 1. PHYSICAL CHARACTERISTICS (mm)

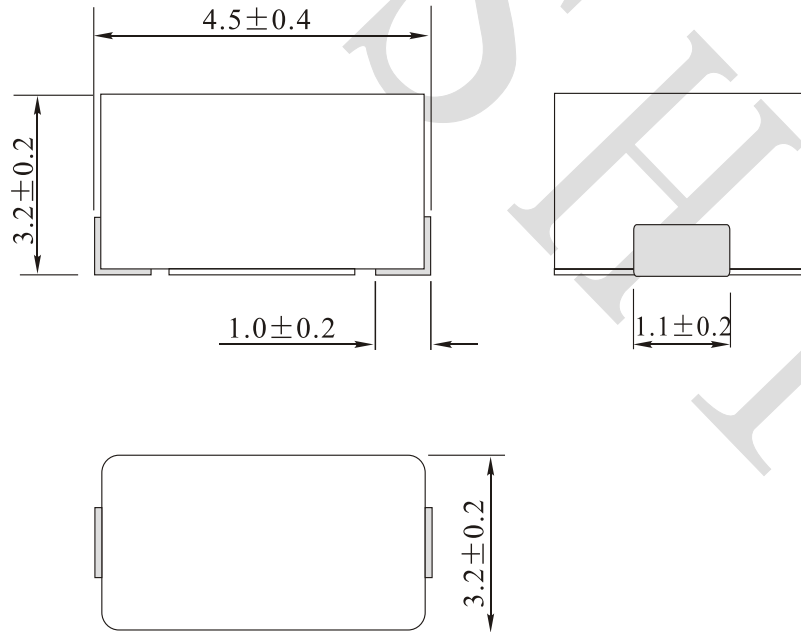

## 2. ELECTRONICAL SCHEMATIC



## 3. ELECTRONICAL SPECIFICATIONS

L: 10uH ± 10% @ 2.52MHz

DCR: 1.6 Ω Max

Q: 50 Min @ 2.52MHz

SRF: 20MHz Min

IDC: 250mA (Inductance drop 10% Max)

Operating temperature: -40°C to +125°C (Including temp. rise)

Storage temperature: -40°C to +105°C

Test Instrument:

L: HP4284A

RDC: HM2540

Note:

1. Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: >28%

NAME:	Surface mount wound molded chip inductors		
CUSTOMER P/N:	B82432T1103K000	DATE:	2020-05-30
SHINHOM P/N:	AISM1812-100K-0.25A	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



**SHINHOM**  
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization