




- **W-25 (25A)**




FEATURES:

- High output and high impedance
- Waterproof

DIMENSIONS: (Unit: mm)

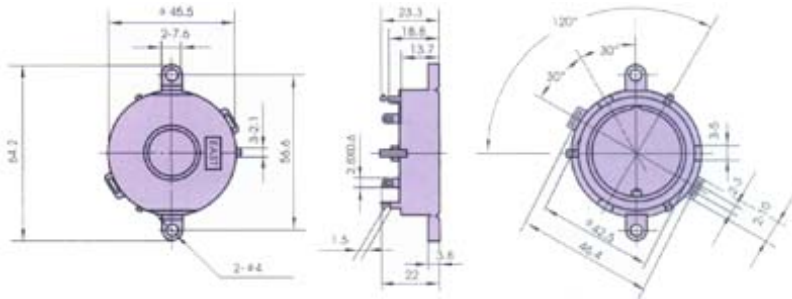

CHARACTERISTICS:

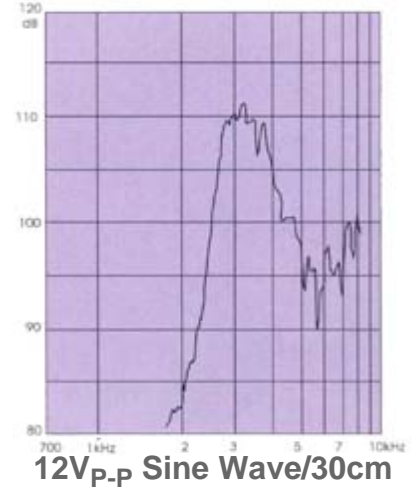

ELECTRICAL SPECIFICATIONS :		
Model No.	W-25	W-25A
Min. Sound Pressure Level (dB)	105/1 Feet/ 12V _{p-p} Sine Wave	
Capacitance at 120 Hz (nF)	140 ± 30%	
Resonant Frequency Range (Hz)	2200 ~ 4000	
Max. Continuous Drive Voltage at Square Wave (50% duty cycle) (V _{p-p})	50	
Max. Intermittent Drive Voltage at Square Wave (50% duty cycle) (V _{p-p})	60	
Operating Temperature (°C)	-40 ~ +80	-40~ +105
Weight (g)	12	
Case Material/Colour	PA6/Black	
PACKING INFORMATION :		
Packing :	400 pcs per export carton	
Carton Size :	47 X 30.5 X 35 cm	
G. Weight :	6.3 kgs	
N. Weight :	4.8 kgs	