


Screw clamping terminal block- UKJ-  
W2.5/2-2D- 011162

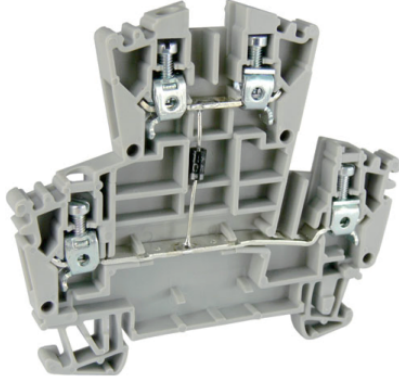

Screw clamping terminal block , rated voltage:400V , Max. operating current:24A, connection method : screw connection , number of connections : 4 , crimping range : 0.5mm<sup>2</sup> -6mm<sup>2</sup> , thickness:5.2mm , height:62.3mm , color : grey , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	40
NW per piece(g)	/
Layers	2
Number of connections	4
Rated cross section(mm <sup>2</sup> )	4
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	400
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

## Product certification

Parameter	Data
Certification logo	<b>CE</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M2.5
Stripping length(mm)	10
Tightening torque	0.4-0.6
Solid conductors(mm <sup>2</sup> )	0.5-4
Stranded conductors(mm <sup>2</sup> )	0.5-2.5
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	69.4
Thickness(mm)	5.2
Height(mm)	62.3