

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

NOTES1:  
 UL Standard  
 1.Rated voltage/current : 300V / 15A  
 2.Withstanding voltage : AC1600V/1Min.

IEC Standard




Pollution degree	2
Overvoltage category	III
Rate impulse voltage(kV)	4.0kV
Rate voltage(V)	400V
Rate current(A)	20A

NOTES2:


1.Dimension shall be interpreted per ASME Y14.5-2009  
 2.Pitch : 7.5/7.62mm, Poles : N=02~12P  
 3.Operating temperature: -40°C~+105°C  
 4.Undimensioned tolerances:

Pitch	range	in	Nominal	dimension	range	mm	mm
Over	6	10	TO	Over	30	60	100
To	10	24	TO	Over	60	100	150
6	10	24	TO	Over	100	150	±2
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

5.RoHS Compliance

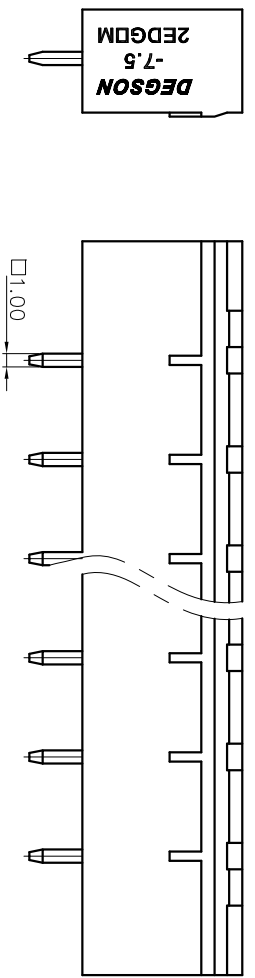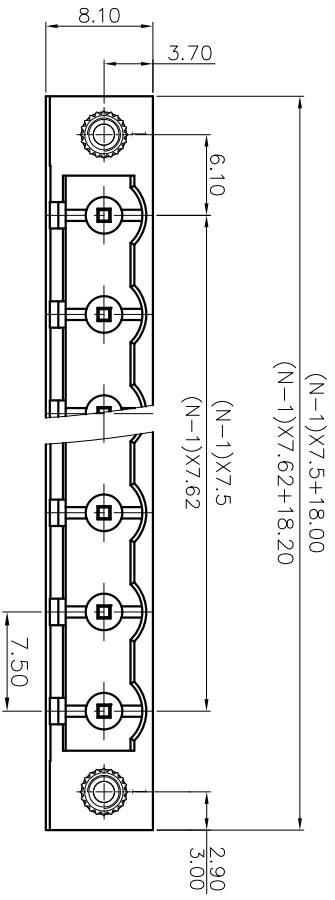

2EDGVM - 7.5/7.62- XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch)(Color) : 1.(Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

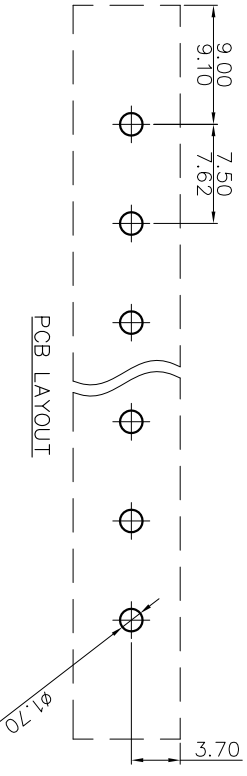

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO.,LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1

A B C D E F G H

8 7 6 5 4 3 2 1