


(P为通道数, P=2-10)

订货信息
Order Info

订货号 PART NUMBER	位数 POLES
303302	2
303303	3
...	...
303309	9
303310	10

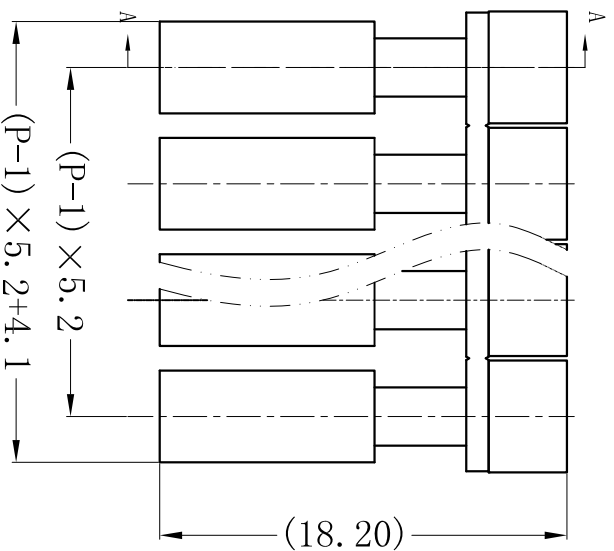

其他信息/Other information

塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	镍/Nickel
阻燃等级/Flame retardant rating	V2
储存及运输环境温度/ Storage ambient temperature	-40°C - +85°C
使用环境温度/Usage ambient temperature	-25°C - +70°C
螺钉类型/Screw-thread	M3
扭矩/Tightening torque	0.6-0.8 Nm

未标注公差参照GB/T14486

基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

单位/Unit	mm	Rev.	Name
		01	3033XX 跨接桥
			3033XX Jumper bridge