



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



$$7.62 \times (N-1) + 9.12$$

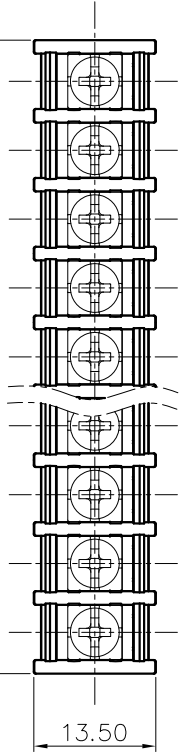

$$0.80 \pm 0.05$$

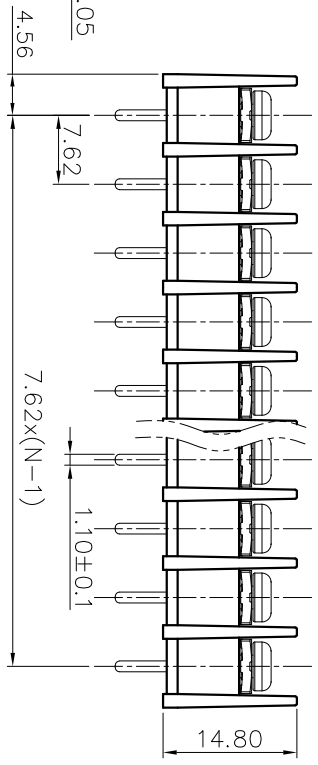

$$4.56$$

$$7.62 \times (N-1)$$

$$1.10 \pm 0.1$$




$$5.30 \pm 0.30$$


- NOTES1:
- UL Standard
  - Rated voltage/current : 300V / 15A
  - Torque value : M3 , 4.43lb.in
  - Wire range : 22~14AWG
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
  - Pitch : 7.62mm, Poles : N=02~24P
  - Withstanding voltage : AC1600V/1Min
  - Operating temperature: -40°C~+105°C
  - Undimensioned tolerances:

Pitch range	in	mm	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO	Over	TO
6	10	30	60	100	150	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150	±0.15	±0.20	±0.30	±0.30	±0.50	±0.50	±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

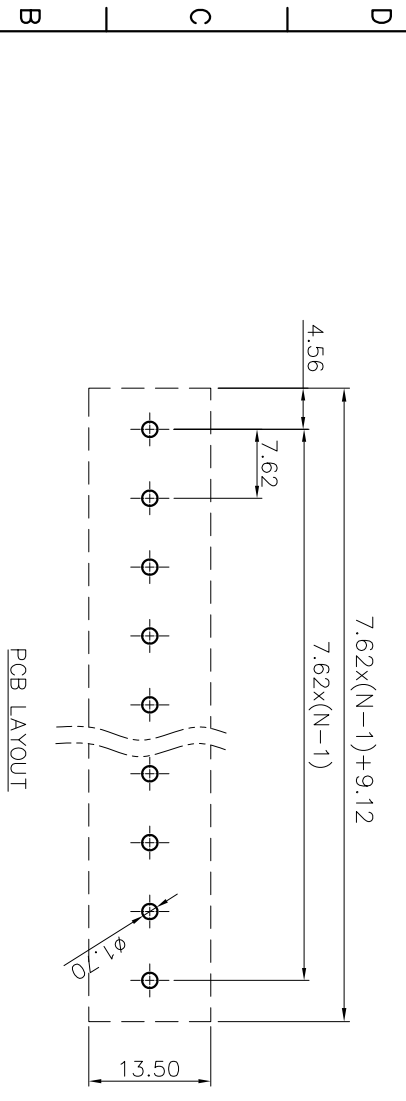

PCB LAYOUT



- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1