
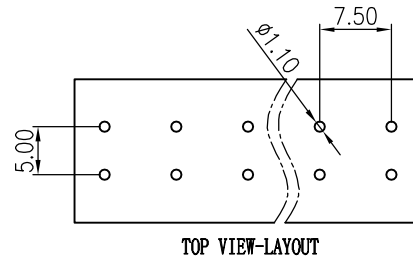
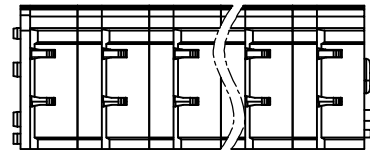


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
▲		增加UL刻字	CSX	07/21/07	
▲		品名、料号增加环保标示“(H)”	LJH	12/08/07	
▲		修改参数	LJH	12/18/08	
▲		更改料号“3020000100” 为“3020000991(H)”	LJH	06/19/09	

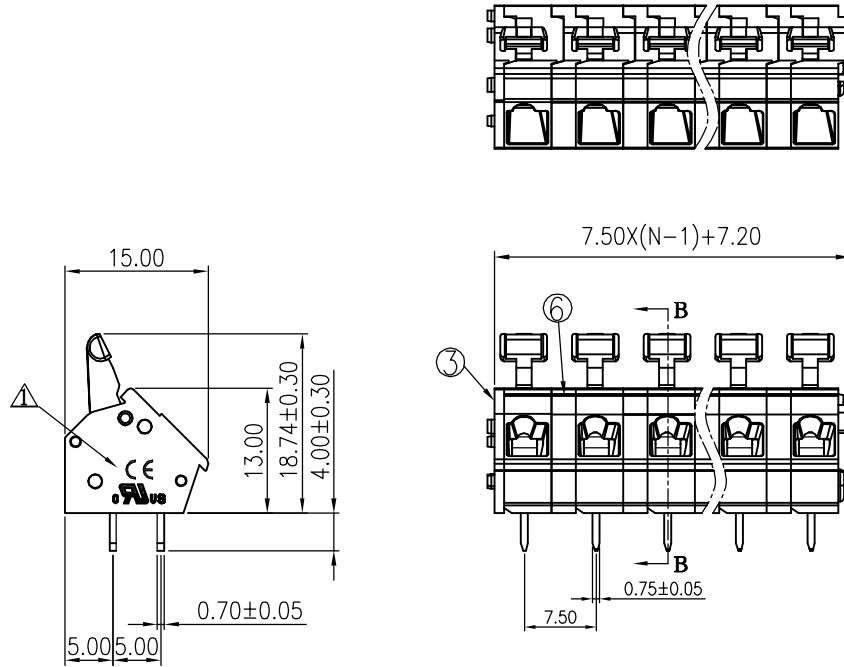

Notes:

1. Pitch:7.5mm ,Poles:XXP
2. Rated voltage/current:UL 300V/15A
IEC 250V/16A ▲
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000M Ω /DC1000V
6. Wire Range:28~12AWG, 2.5mm²
7. Undimensioned Tolerances:

	Pitch range in mm		Nominal dimension range in mm				—
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
to 6	±0.10	±0.15	±0.25	±0.2±0.3	±0.5±0.7	±1.0	0.05/0.1

6	DG243-5.0-Clapboard	3027HOY01A(H)	XX-1	PA66	UL94V-0
5	DG245 Pin header	3025B00010(H)	XX	Phosphor bronze	SnCe
4	DG242 Spring	X000000991(H)	XX	Stainless steel	
3	DG243-5.0-COVER	3027COY01A(H)	1	PA66	UL94V-0

2	DG243-5.0-BUTTON	3027D1701A(H)	XX	POM	UL94HB
1	DG243-5.0-HOUSING	3027AOY01A(H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS		DFTO LTR	DATE 01/20/07	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG243-7.5-XXP-1Y-00A(H)	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
MM		APPVL	DATE		
.00 ±		MATERIAL :			
.000 ±		ANGLES ± 1'		DRAWING NO. DG243-7.5-E01	
THIRD ANGLE PROJECTION		FINISH :		/PART NO.	
		SCALE :		DO NOT SCALE DRAWING	
				SHEET 1	OF 1