



- NOTES:
- MATERIAL
    - INSULATOR:THERMOPLASTIC(UL 94V-0).
    - CONTACT: COPPER ALLOY.
  - SPECIFICATION
    - TEMPERATURE: -25°C~+85°C.
    - CONTACT RESISTANCE: 20mΩ max.
    - INSULATION RESISTANCE: 500MΩ min.
    - DIELECTRIC WITHSTANDING VOLTAGE: AC 250V PER MINUTE.
  - PART NUMBER: DS1020-03
  - PRODUCT NUMBER CODE:
 

DS1020-03- X X X X - X

    - X: PACKING TYPE(FOR MALE) (B)
    - R: TAPE ON REEL
    - N/A: PLOYBAG
    - CONTACT PLATING
    - T1: TIN
    - 8: FULL GOLD FLASG
    - HOUSING COLOR
    - V: IVORY
    - B: BLACK
    - CONNECTOR TYPE
    - M: MALE
    - F: FEMALE
    - No. OF CONTACTS
    - 02~16

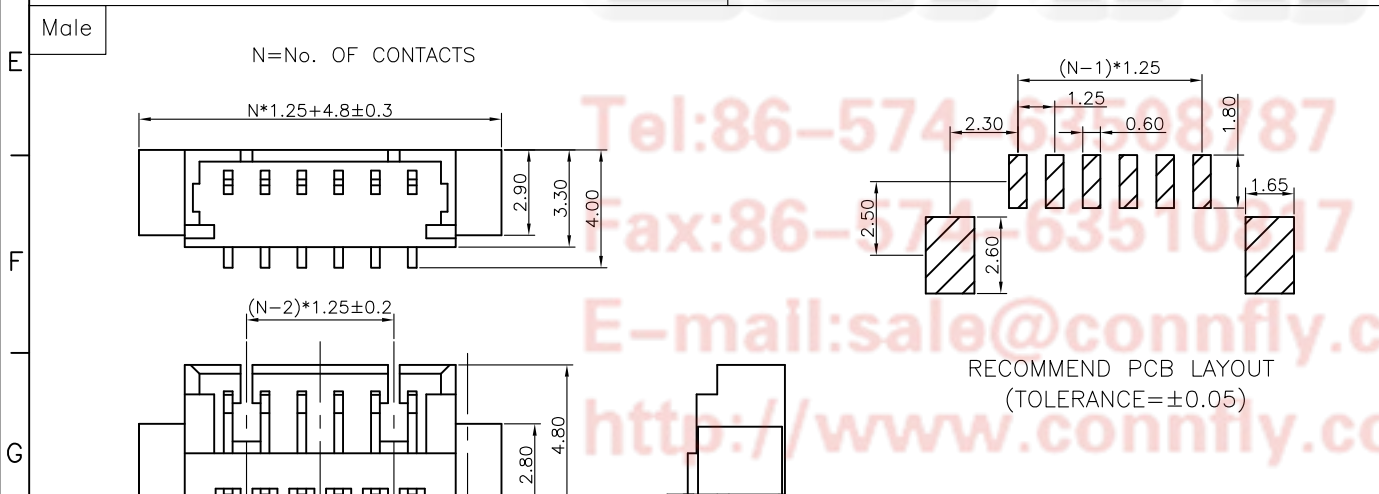

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	1.25mm WAFER CONNECTOR
.X	±0.38	.X	±3°		V/T SMT TYPE
.XX	±0.25	.XX	±2°		
DRAWING TYPE		CUSTOMER		UNITS	SHEET SIZE
SCALE		1:1		A4	SERIES
DRAWING NO.		C-DS1020-03-XXXX-X-C		DS1020-03 SERIES	



**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**