

I.D.C Socket Series

KLS1-204C I.D.C SOCKET 1.27mm (0.050")

Electrical Characteristics:


Current Rating: 1 AMP
Insulator Resistance: 1000M Ohm min. at DC 500V
Contact Resistance: 30m Ohm max. at DC 100mA
Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
Contacts: Brass or Phosphor Bronze
Plating: Selective gold plated: gold plated on mating area and Nickel plated on wire cutting area
Gold plated: 3u" over 50u" nickel
Cable: 0.635mm (0.050") pitch flat cable

Features:

- * Optional polarizing key, polarizing bump.
- * Optional strain relief.

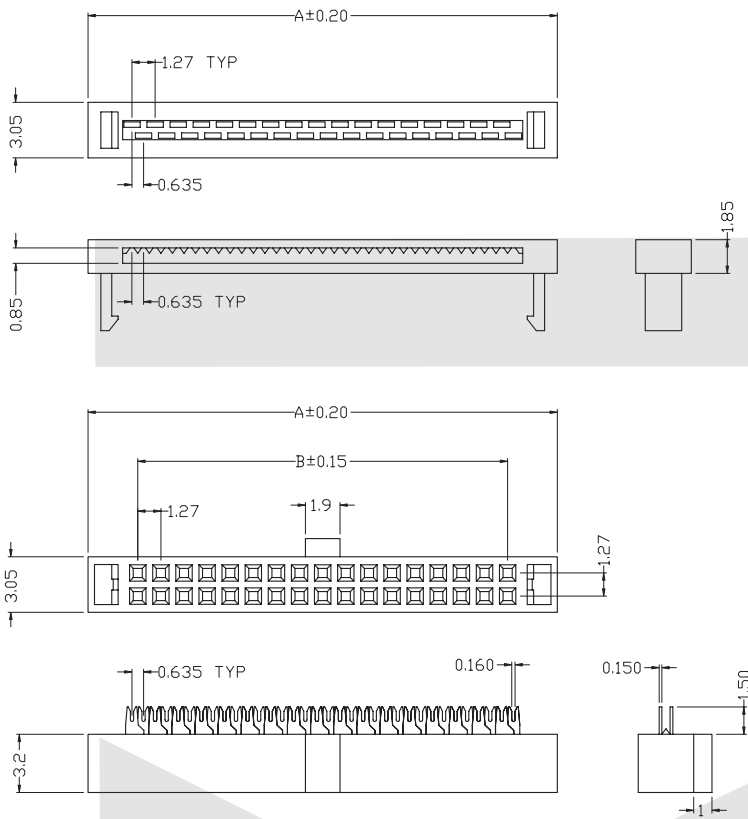

Dimension

Position	A	B
08	9.27	3.81
10	10.54	5.08
12	11.81	6.35
14	13.08	7.62
16	14.35	8.89
20	16.89	11.43
24	19.43	13.97
26	20.70	15.24
30	23.24	17.78
34	25.78	20.32
40	29.59	24.13
44	32.13	26.67
50	35.94	30.48
60	42.29	36.83
80	54.99	49.53

ORDER INFORMATION

Product NO.: KLS1-204C-XX-B

Pos. NO. _____ Insulator Color: B=Black G=Gray L=Blue
I.D.C SOCKET 1.27*1.27mm Series _____ Number of Contacts: XX=06-80Pin