


Push-in terminal block- UJ6-6/2 × 2JD - 421508

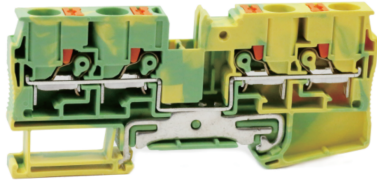

Push-in terminal block , connection method : spring connection , number of connections : 4 , crimping range : 0.5mm<sup>2</sup> -10 mm<sup>2</sup> , AWG : 14-8 , thickness:8.2mm , height :42.2mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	28
NW per piece(g)	25.7
Layers	1
Number of connections	4
Rated cross section(mm <sup>2</sup> )	6
Color	yellow-green
Insulation material	PA
Flame retardant grade	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

## Product certification

Parameter	Data
Certification logo	CE
Certification logo	cUL <sup>®</sup> US
Certification logo	RoHS

## Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	16
Solid conductors(mm <sup>2</sup> )	0.5-10
Solid conductors AWG	14-8
Stranded conductors(mm <sup>2</sup> )	0.5-6
Stranded conductors AWG	14-10
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +55
Relative humidity	30% ~ 90%

## Dimension

Parameter	Data
Width(mm)	94
Thickness(mm)	8.2
Height(mm)	42.2