
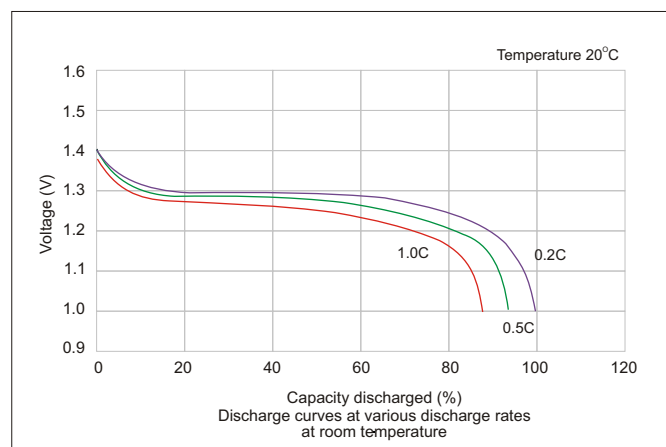
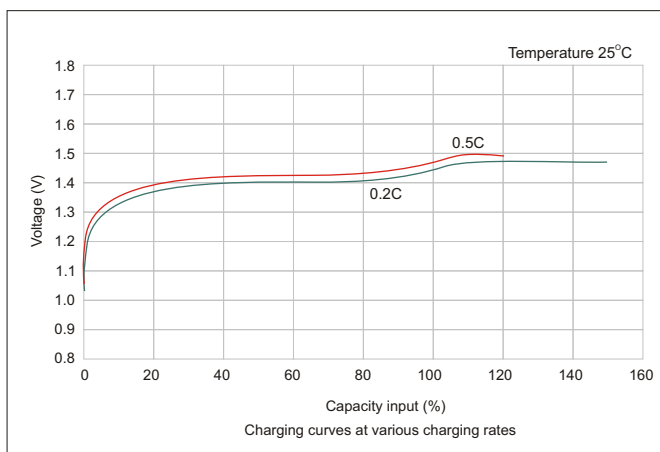


MH-2000AAH Specification
 NiMH Cylindrical Battery
 Size: AA IEC: KR15/51

Typical Characteristics

| Model: MH-2000AAH | |
|----------------------------|--|
| Specifications | |
| Nominal Voltage (V) 1.2V | |
| Capacity | Typical (mAh) 2000 |
| | Minimum (mAh) 1900 |
| Dimension | Diameter (mm) 14.5 ⁺⁰ _{-0.7} |
| | Height (mm) 50.5 ⁺⁰ _{-1.5} |
| Charging | Standard 190mA(0.1C ₅) x 16 hrs |
| | Rapid 950mA(0.5C ₅) x 2.4 hrs -ΔV = 5mV |
| | Trickle 95mA(0.05C ₅) x 48 hrs |
| Operating Temperature (°C) | Standard Charging 0 ~ 45°C |
| | Rapid Charging 10 ~ 40°C |
| | Discharging -20 ~ 60°C |
| | Storage -20 ~ 35°C |
| Service Life | >500 cycles (IEC standard) |
| Internal Resistance | 30m Ohm (upon fully charged) |
| Weight | Approx.27g |
| Cuff-off Voltage (V) | 1.00 |

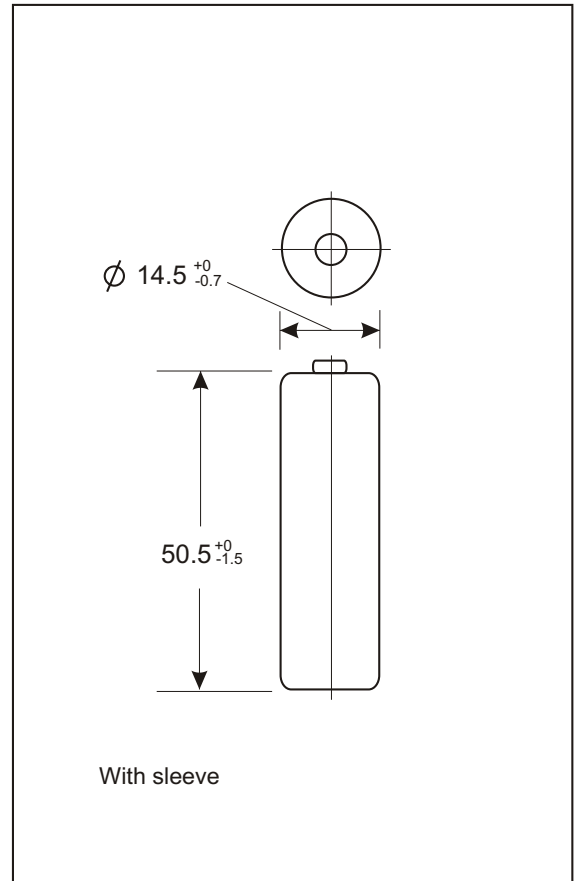

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.