




Quartz Crystal


HC-49/U3H (low profile)

model	KX - 3HT
frequency	27,0 MHz
holder type	HC-49/U3H
mode	fundamental
operating temperature	-40° ~ + 85°C
frequency tolerance at +25°C	± 50 ppm
temperature tolerance at -40° ~ + 85°C	± 100 ppm
load capacitance C_L	16 pF,
series resonance R_1 max.	100 Ohm
aging at +25°C (first year) max.	± 5 ppm
shunt capacitance C_0 max.	7 pF
drive level mW	0,1
RoHS	according to RoHS 2011/65/EU
part no.	12.84308

Dimensions (mm):

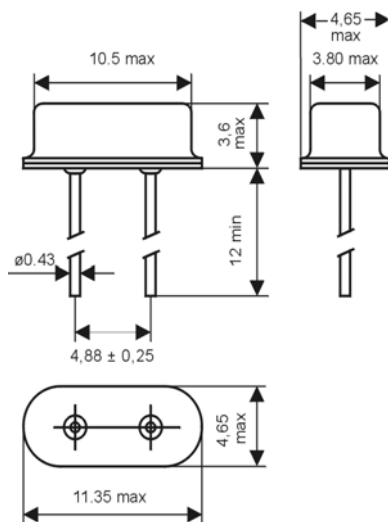

Wave soldering condition:

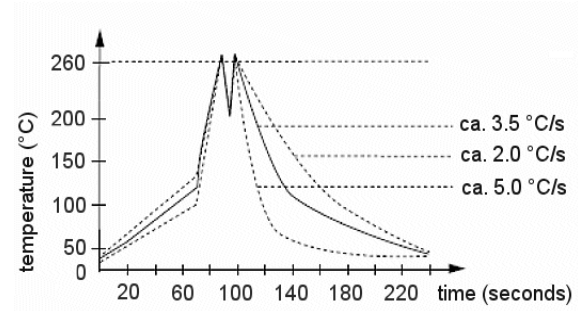

Tape specification:

