


The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

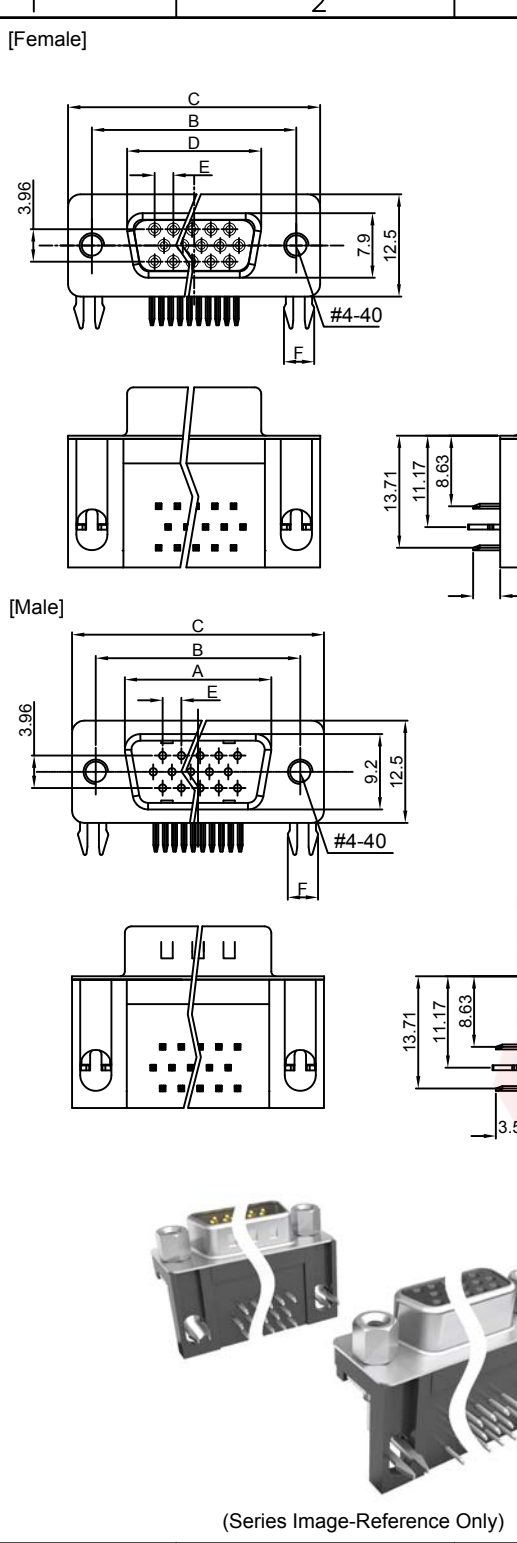


Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.84	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/27/05'		LJC 09/27/05'
D	DRAWING UPDATE	JLZ 10/07/20'		

- NOTES:
- Electrical characteristics:
    - Contact resistance: 20mΩ Max. Initial.
    - Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
    - Insulation resistance: 1000MΩ Min.
  - Environment characteristics:
    - Temperature range: -40°C~+105°C.
  - Materials:
    - Insulator:PBT+Glass fiber
    - Shell:Steel
    - Contact:Copper alloy
  - Product number code:

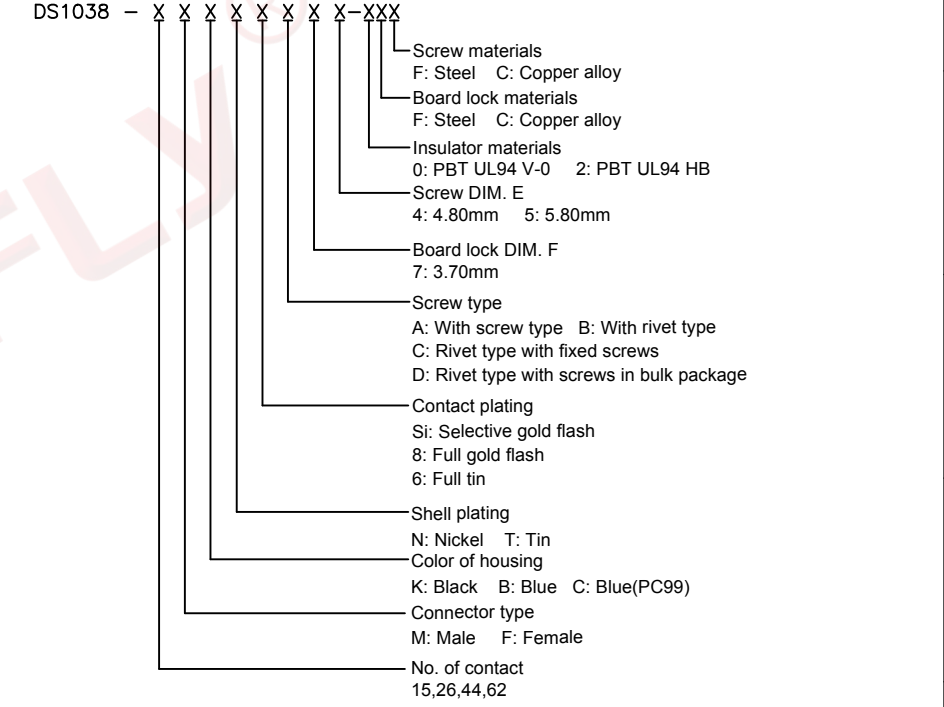

Recommend PCB layout (Tolerance:±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1038-XXXXXXX-XXX-D		

PROJECTION		TITLE
UNITS	mm	H.D-SUB R/A Type
SHEET SIZE	A4	SERIES DS1038 SERIES

**晨翔电子有限公司**  
**CONNPLY CONNPLY ELECTRONIC CO. LTD**

(Series Image-Reference Only)