


Category: 插拔式端子-插座/Plug-in terminal-plug

Product name: 4784XX

Product Description: 7.62mm , 500V , 16A CE , UL



## Product Picture

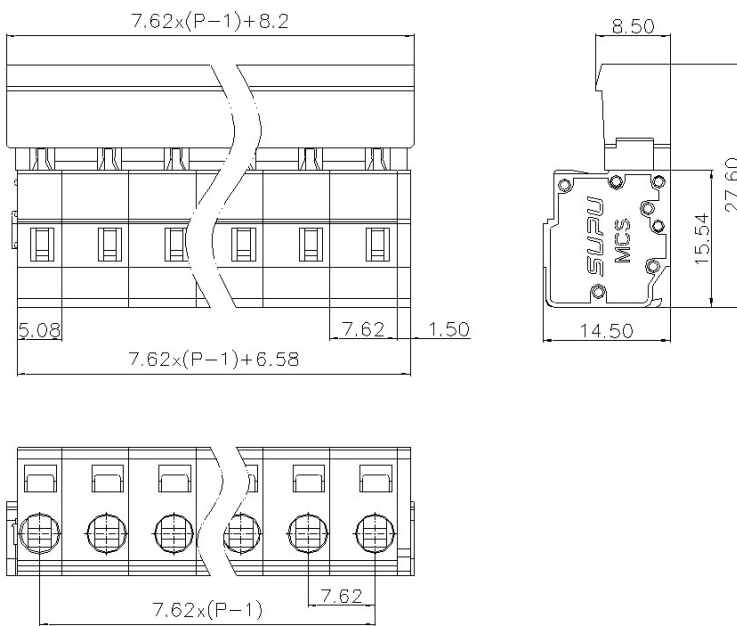

## 基本信息 /Basic Information

|                               |        |
|-------------------------------|--------|
| 产品型号<br>SUPU ID               | 4784XX |
| 产品间距<br>Pitch                 | 7.62mm |
| 产品层数<br>Number of levels      | 1      |
| 产品位数<br>Number of connections | 2P-24P |
| 接线方式<br>Connection method     | -      |
| 防护等级<br>Protection Level      | IP20   |

|                          |            |
|--------------------------|------------|
| 工作温度<br>Work temperature | -40~+105°C |
|--------------------------|------------|

## IEC数据 /IEC Data

|  |                        |      |       |
|--|------------------------|------|-------|
| 额定电流<br>Rated Current  | 16A                    |      |       |
| 额定电压<br>Rated Voltage  | 500V                   |      |       |
| 过压类别<br>Overvoltage category                                   | III                    | III  | II    |
| 污染等级<br>Pollution degree                                       | 3                      | 2    | 2     |
| 额定冲击电压<br>Rated impulse voltage                                | 6KV                    | 6KV  | 6KV   |
| 额定电压<br>Rated Voltage  | 500V                   | 630V | 1000V |
| 硬导线截面积<br>Conductor cross section solid                        | 0.2-2.5mm <sup>2</sup> |      |       |
| 柔性导线截面积<br>Conductor cross section flexible                    | 0.2-2.5mm <sup>2</sup> |      |       |
| 柔性导线截面积，带绝缘管套<br>Conductor cross section flexible,with furrule | 0.2-2.5mm <sup>2</sup> |      |       |
| 锁线螺钉规格<br>Locking screw Specification                          | -                      |      |       |
| 额定扭矩<br>Rated Torque   | -                      |      |       |
| 固定螺钉规格<br>Fixed Screw Specification                            | -                      |      |       |
| 额定扭矩<br>Rated Torque   | -                      |      |       |
| 剥线长度<br>Stripping length                                       | 8-9mm                  |      |       |

## UL数据 /UL Data

|                       |      |   |      |
|-----------------------|------|---|------|
| 使用组别<br>Use group     | B    | C | D    |
| 额定电流<br>Rated Current | 15A  | - | 10A  |
| 额定电压<br>Rated Voltage | 300V | - | 300V |

---

|                               |          |
|-------------------------------|----------|
| 额定接线容量<br>Rated cross section | 28-14AWG |
|-------------------------------|----------|

---

## 材料信息 /Material Data

---

|  |              |
|--|--------------|
| 绝缘材料<br>Insulation material                            | PA66         |
| 绝缘材料组别<br>Insulation material group                    | I            |
| 阻燃等级, 符合UL94<br>Flame retardant grade, UL94 compliance | V0           |
| 导电体材料<br>Contact material                              | Copper alloy |
| 导电体表面镀层<br>Surface characteristics                     | Sn,Plated    |

---

## 产品认证 /Product Certification

---

|                     |  |
|---------------------|--|
| 认证图标<br>Certificate |  |
|---------------------|--|

---

|                      |
|----------------------|
| UL证书号<br>UL file No. |
|----------------------|

---

|                   |
|-------------------|
| VDE证书号<br>VDE No. |
|-------------------|

---

|                   |
|-------------------|
| TUV证书号<br>TUV No. |
|-------------------|

---

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code