
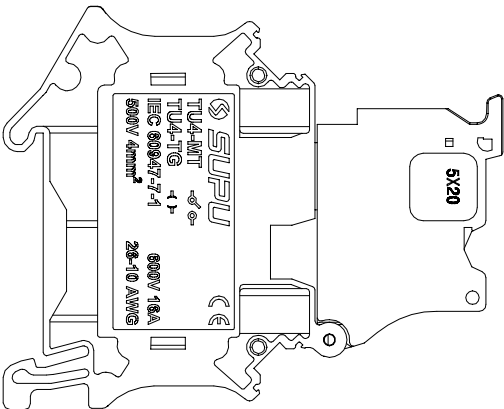
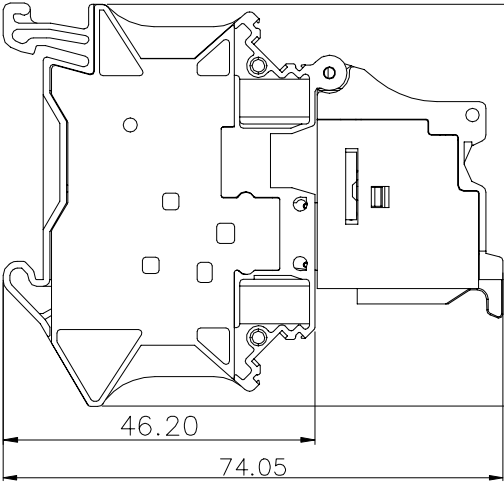


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



Connection method:
 1.For solid wire, peeling wire in right length, fix in by rated torque force.
 2.For stranded wire,connect directly after peeling in right length,or furred on wire and fix in by rated torque force.
 (Attention:torque force should be equable, no explosive power.)

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
 未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

原图号 Old Draw. No.	
底图总号 Assembly No.	
常用件登记 Common Part	

Surge voltage category	III
Pollution degree	3
Rated surge voltage(kV)	6
Rated voltage(V)	500
Rated current(A)	20

IEC Standard
 1. Conductor cross section :

Wire range(Solid/Stranded)	0.2-4mm ²
Solid	0.2-6mm ²
Stranded	0.2-4mm ²
Stranded with ferrules without plastic sleeve	0.2-4mm ²
Stranded with ferrules with plastic sleeve	0.2-4mm ²

Material:

Insulator	PA66	UL94 V-0
Cover	PA66	UL94 V-0
Cage	Steel	Zn plated
Conductor	Copper alloy	Sn plated
Screw	Steel	Zn plated

General information:

- Dimension shall be interpreted per ASME Y14.5-2009
- Stripping length : 9mm
- Operating temperature: -40°C~+105°C
- RoHS Compliance
- Undimensioned Tolerances:

Pitch Range	In		mm		Nominal Dimension	Range		mm
	Over	Under	Over	Under		Over	Under	
6	10	TO	30	TO	60	TO	100	150
10	24	TO	30	TO	60	TO	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2

订货号 Order No.	TU4-SPLIT-BK	签字 Signature		日期 Date		名称 Name	TU4系列侧面螺钉 悬臂式分断 接线端子	未注公差 Tolerance	表面 Surface	
项目 Item						图号 Drawing No.	PRM003703	版本号 Revision Number	VD121	
设计 Design	洪星			2023.04.25		材料 Material	Notes			
审核 Check	卢小卫			2023.04.25		物料号 Item No.	4111047018			
工艺 Process										
标准化 Unity										
批准 Approve	梁文龙			2023.04.25						

第1页/共1页 1 of 1	重量 Weight	比例 Scale
	/	1:1

NINGBO SUPU ELECTRONICS CO., LTD.