


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		增加UL刻字	CSX	08/31/07	
△		增加VDE及参数刻字	LJH	02/10/09	

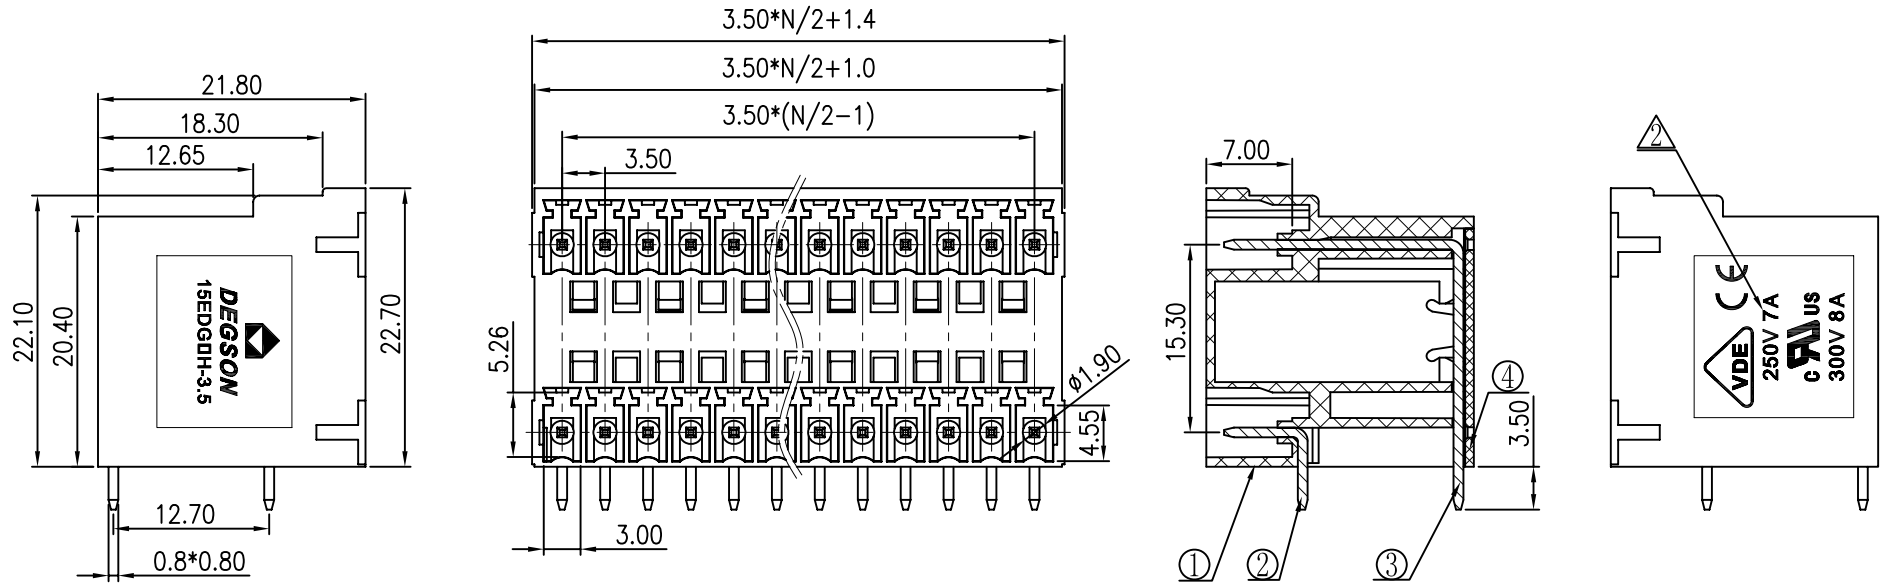

Notes:

1. Pitch:3.5mm , Poles:4-48P
2. Rated voltage/current:UL 300V/8A
VDE 250V/7A
3. Operation temperatures:-40°C~+105°C
4. Withstanding Voltage:AC2000V/1min
5. Insulation Resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	over	to	over	over	over		
6	6	10	30	60	100	150	—	
to	to	to	to	to	to	to	∩	
6	10	24	30	60	100	150	□	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	
							0.05/10	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	15EDGV/RH-3.5-Cover	1063COYXXA (H)	1	PA66	UL94V-0
3	15EDGRH-Curve Pin	1063B00020 (H)	N/2	Brass	SnCe
2	15EDGRC-Pin	1003B00010 (H)	N/2	Brass	SnCe
1	15EDGV/RH-3.5-Housing	1063AOYXXA (H)	1	PA66	UL94V-0

DETAILED LISTS	MM (INCH)	DFTO	ExpsAny	DATE	09/30/05
	TOLERANCES EXCEPT AS NOTED	CHKD		DATE	
		MFO		DATE	
		APPLY		DATE	
MM	±	MATERIAL :			
.0 ±	±	G. E :			
.00 ±	±	FINISH :			
.000 ±	±	SCALE : 1:1			
ANGLES ± 1°		DO NOT SCALE DRAWING			
THIRD ANGLE PROJECTION		SHEET 1 OF 1			

DEGSON® 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
15EDGRH-3.5-XXP-1Y-00A (H)

DRAWING NO. 15EDGRH-3.5-E01 SIZE A3 REV T2
/PART NO. 02/10/09