
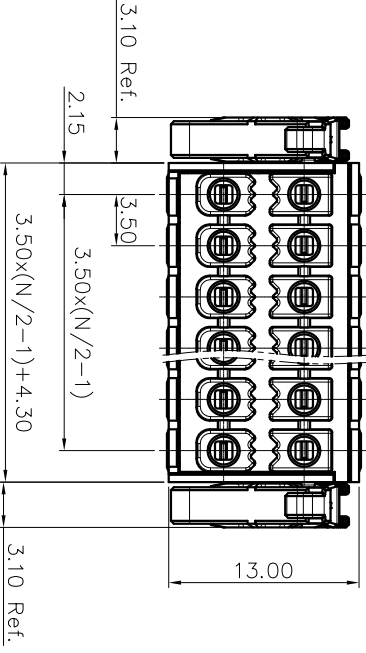
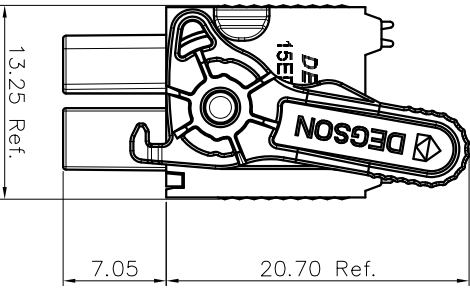
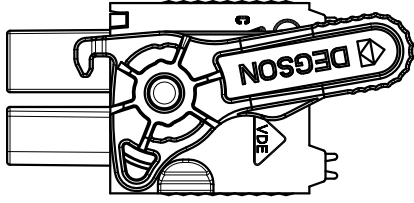
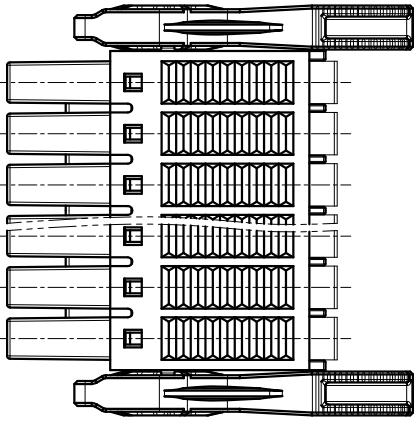


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

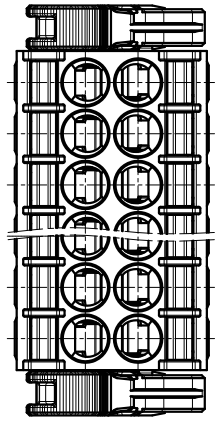

- NOTES1:
UL Standard
1. Rated voltage/current : 150V / 8A
2. Withstanding voltage : AC1500V/1Min.
3. Wire range : 26~16AWG
IEC Standard

Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(kV)	2.5kV	2.5kV	2.5kV
Rate Voltage(V)	320V	250V	200V
Rate Current(A)	9.5A		

2. Wire range : 0.2~1.5mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=04~48P
3. Stripping length : 10mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in Nominal dimension range		mm		In mm		mm		mm	
Over	10	Over	30	Over	100	Over	150	0.1/10	
TO	10	TO	30	TO	100	TO	150	<	
6	10	24	30	60	100	150	±2°		
±0.15 ±0.20 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30									

6. RoHS Compliance

15EDGKNHG - 3.5 - XXP - 1Y - 00A (H)
(Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1. (Grey)
2. (Blue)
3. (Black)
4. (Green)
5. (Orange)
6. (Red)
7. (Transparent)
8. (Yellow)
9. (White)

00A - (Standard)
(RoHS)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		REV	DO
		SHEET	1/1
		SCALE	1:1

A B C D E F G H

8

7

6

5

4

3

2

1

A B C D E F G H