

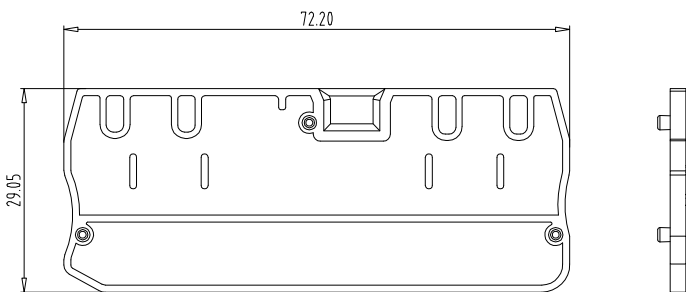


2		1	
REV	CONTENT	CHK	DATE
V0.0	CONTENT	SYJ	25.08.08

Electrical :

- 1.Operating Temperature : -40℃~+105℃
2.RoHS Compliance
3."★" is the key quality control point

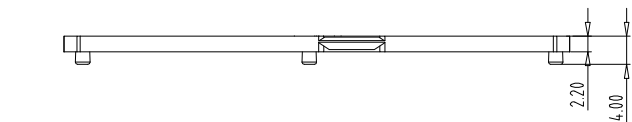

① Cover plate ④ Connection quantity

② Sereies NO.
③ Wire diameter

⑤ Color: GY-Grey
BU-Blue
BK-Black
GN-Green
OG-Orange
RD-Red
YE-Yellow
WH-White
PE-Yellow & Green
BE-Beige

A	Total Pitch Tolerances in mm									Nominal dimension range in mm									$\perp$		$\equiv$	$-$		$//$					
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10		over 0	over 100	over 150				
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10		all		to 100	to 150					
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5				
6										5										4									

1	HOUSING		XX		1	PA66 UL94V-0			SEE NOTE		
ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE		
DWG.	SYJ	DATE	25.08.08		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1	
CHK.		DATE			SCALE	1:1		D-GP2.5-4-X			
APP.		DATE			NAME						
Grolten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWGNO.	XXXX					

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.