

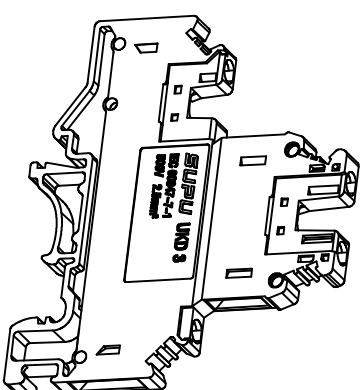
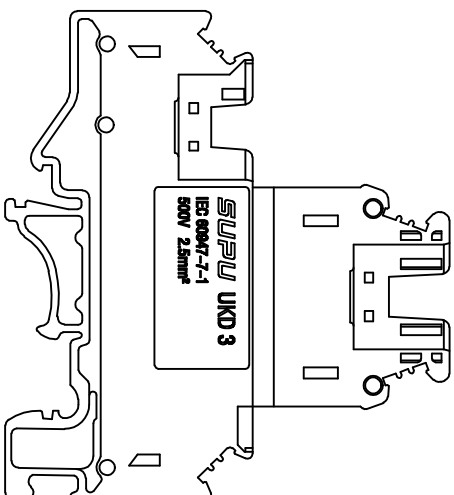


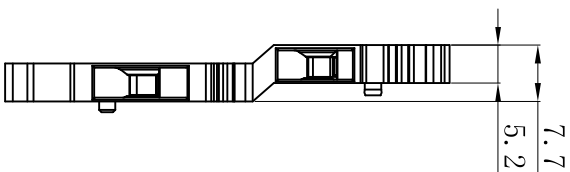

宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

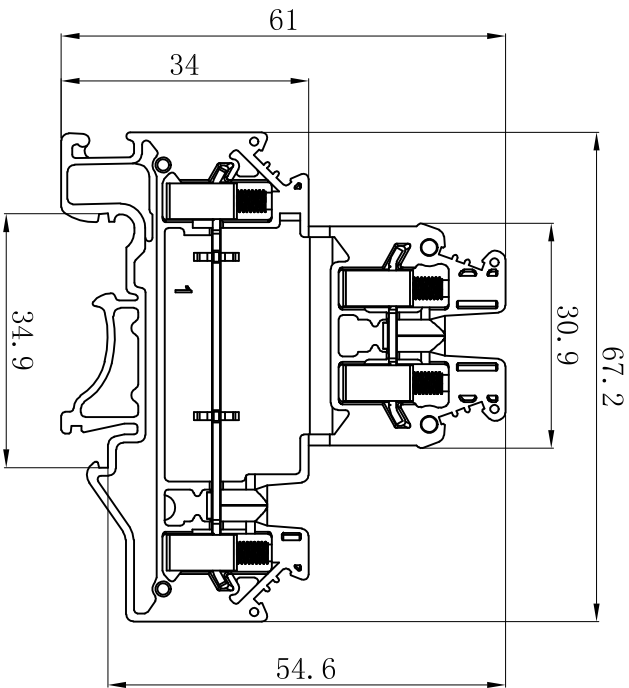

| 技术参数/Technical Parameter | IEC |
|--|------------------------|
| 额定电压/Rated voltage | 500V |
| 额定电流/Rated current | 32 A |
| 接线面积/Wire range | 0.2-2.5mm ² |
| 额定冲击电压/Rated impulse withstand voltage | 6 KV |
| 阻燃等级/Flammability rating | UL94 V-0 |
| 材料/Insulating material | PA66 |
| 接触材料/Current carrier material | 铜合金/Copper |
| 螺钉类型/Screw-thread | M3 |
| 扭矩/Tightening torque | 0.6~0.8 Nm |

订货信息
Order Info

| | |
|--------|----|
| 订货号 | 颜色 |
| 303921 | 灰色 |



宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

| | | | | |
|------|-------|-----------|--------|----------------------|
| DWG. | Zhang | 2015.5.15 | Rev. A | 303921 双层铆装螺钉接线端子规格书 |
| CHK. | | | | |
| APP. | | | | |